



TELECOM

Tools You Need to Move with the Speed of Technology



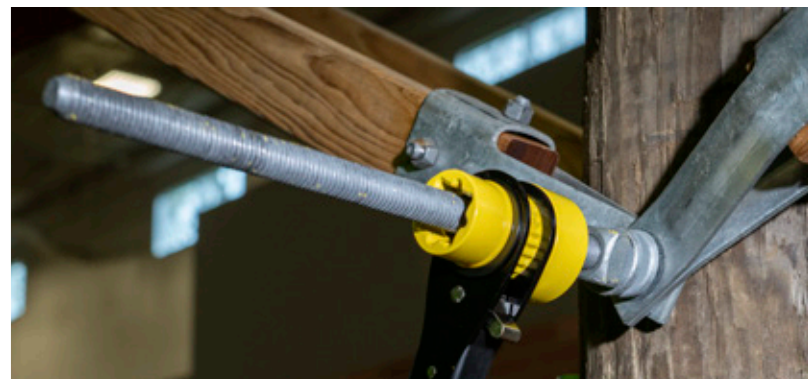


TABLE OF CONTENTS

Bucket Work Center Rail System	2-4
Bucket Work Center S-Hook System	5
Personal Protection & Safety Equipment	6-16
Hard Hats & Safety Helmets	6-9
Hard Hats & Safety Helmets Accessories	9-10
Hard Hats & Safety Helmets Lighting Accessories	11
Illumination	12-13
Safety Glasses & Hearing Protection	14
Knee Protection	15
Warming/Cooling Gear & Gloves	16
Wire Pulling Grips	17
Pliers	18
Multi-Bit Screwdriver & Nut Drivers	19
Insulated Screwdriver & Nut Drivers	19-20
Wrenches & FLIP Sockets	21
Hammers	22
Levels & Measuring	23
Saws, Knives & Blades	24
Drill Bits	25
Backpacks & Jobsite Accessories	26
Multimeters	27
Clamp Meters	28-30
Electrical Testers	31
Thermal Imagers	32
Pull & Fish Tapes	33
Voice Data Video (VDV)	34-36
Voice Data Video (VDV) Cable Stapler	37

These days, it can be hard to find companies that make products you can count on.

But that's exactly what you'll get from Klein Tools. We don't just make great products, we make great products that stand up to the demands of the professionals who use them every day. Because our standards are as high as yours, we demand that every product we offer delivers all the performance, durability and precision that you need to get the job done right.

And by using only the highest quality materials, superior workmanship, and keeping our manufacturing as close to home as we can, we're able to uphold those rigorous standards.

So buy a Klein tool and you'll know what all the professionals know... when you pick up a Klein, it'll never let you down.

That's why we're the choice of professionals in the USA

Warning Symbols

	Warning Symbol		Strong Magnetic Field		Do Not Push Or Hammer
	Wear Eye Protection		Laser Warning		Do Not Strike Hammer Faces Together
	Do Not Use On Or Near Live Electrical Circuits		Use Safe Work Position		Do Not Extend Handle Length
	Read Instructions Before Use		Pinch Point Hazard		Do Not Sit
	Risk Of Shock		Do Not Use To Chisel		Do Not Step or Stand
	For Use on Bare Live Conductor (Clamp Meter)		Do Not Use To Pry		Not For Fall Arrest
	Double Insulated		Not Personal Protective Equipment		Risk of Drowning

See www.kleintools.com/warranty


For more information.

WARNINGS/CAUTIONS:

For all products,

see www.kleintools.com





BUCKET WORK CENTER™


RAIL SYSTEM



Wall Assembly

- Available in 3 sizes to fit standard utility buckets
- 50 lb load rating for each rail
- Heavy-duty materials made with UV resistant plastic to stand up to tough working conditions
- Special design bumpers allow Rail System to stay in place during transit and articulation of aerial buckets
- Easily attaches to utility buckets with quick release and adjustable clamps
- Features (4) inside and (1) outside rail for customization
- Patent Pending

2 Man Wall Assembly

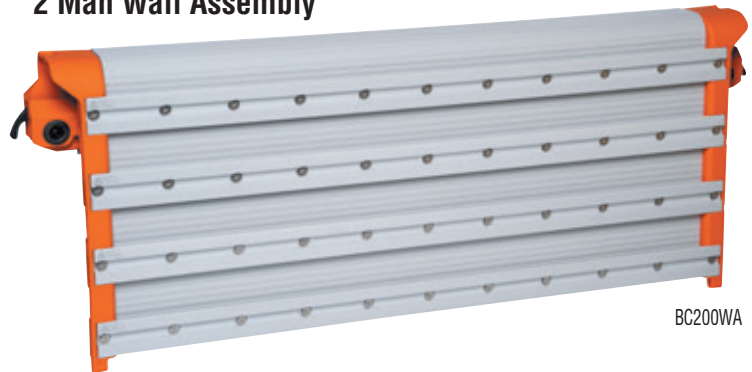


BC200WA

1 Man Wall Assembly



BC100WA

1.5 Man Wall Assembly

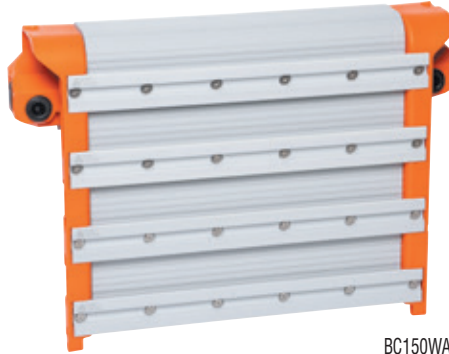

BC150WA

Integrated Corner Piece

- Seamlessly connects to the Wall Assembly pieces for a continuous storage system
- 4 hooks and a flip bar can swivel in and out
- Accommodates different size lineman tools while making use of dead space in the corner
- Made with impact resistant nylon to stand up to tough working conditions



BC599

Wall Assembly, S-Hook Module



BC100S

Storage Wall Assembly



BC99WA

View Details Online...



Hard Tool Storage Module

- 18 compartments hold a wide variety of lineman tools
- Rare-Earth magnets hold hardware and small tools
- Innovative design intended to be more durable than traditional tool aprons
- Rubber flaps hold tools during transit and are also adjustable and replaceable
- Made with impact resistant nylon to stand up to tough working conditions



BC501C

Magnetic Tool Storage Module

- Rare-Earth magnetic plates hold hand tools, sockets, bits and small parts
- Strong enough to hold lineman's pliers
- Made with impact resistant nylon to stand up to tough working conditions



BC504C

Tool Apron Storage Module

- 12 compartments to accommodate a wide variety of lineman tools
- Double stitched hammer loop and knife pouch helps keep tools secure when not in use
- Rare-Earth magnets hold hardware and small tools
- Innovative design intended to be more durable than traditional tool aprons
- Bonus buckle for extra storage



BC502C

Socket Storage Module

- 6 slots to store commonly used impact socket sizes or Klein's Impact Socket Set, sold separately (Cat. No. 66010)
- Fits a range of socket sizes from 3/8" to 1-1/8"
- Magnetic slots to keep sockets in place during transit
- Sockets are stored from smallest to largest to quickly identify the right size needed for the job
- Made with impact resistant nylon to stand up to tough working conditions



BC509C

Auger Bit Storage Module

- 2 slots to store 12", 18", or 24" long auger bits
- Aluminum Spacer slides into one slot to store a 12" auger bit in the 18" holder or store an 18" long auger bit in the 24" bit holder
- Module will not melt with hot auger bits, or dull tips of auger bits
- Made with impact resistant nylon to stand up to tough working conditions



BC507C

Open Hook Module

- Easily attaches to the inside rails of the Wall Assembly
- Single hook holds a wide variety of lineman tools
- Made with impact resistant nylon to stand up to tough working conditions



BC505C

Closed Hook Module

- Easily attaches to the inside or outside rails of the Wall Assembly
- Helps secure tools to prevent from falling
- Single hook holds a wide variety of lineman tools
- Open the latch even with gloves on
- Made with impact resistant nylon to stand up to tough working conditions



BC506C

Utility Bar Storage Module

- 10" long bar allows tools to slide in and out with ease
- Holds lineman tools including hammers, straps, ropes and long handled tools
- Made with impact resistant nylon to stand up to tough working conditions



BC508C



Hardware Pouch Module, Rail System

- Connects to the Bucket Work Center Rail System and holds a wide variety of lineman hand tools and hardware
- Dual Action Carabiner helps keep tools and parts secure when in transit
- Drain holes to prevent water build-up
- Robust latches on each Bucket Work Center module can be handled with class 2 insulated gloves to effortlessly reorganize the Rail System to help improve workspace efficiency



BC510C

Work Tray Module, Rail System

- Connects to the Bucket Work Center Rail System and holds a wide variety of lineman hand tools, power tools, and hardware
- Made with UV resistant, dielectric plastic to withstand all work conditions from -25° to +125° F, 1000V to 35kV
- Positioned on the outside of an aerial bucket with optimal height to help prevent fatigue
- Work Tray is 20.6" x 12.2" x 8.8" (52 x 31 x 22 cm) to fit tools and hardware in a variety of sizes



BC503C

Large Pouch Module, Rail System

- Connects to the Bucket Work Center Rail System and holds a wide variety of lineman hand tools, power tools, and hardware
- Dual Action Carabiner keeps tools and parts secure when in transit
- Front Pockets to store hardware and accessories
- Made with impact resistant nylon and 1680D material to stand up to tough working conditions



BC511C

Multi-Tool Holder Module, Rail System


- Connects to the Bucket Work Center Rail System and holds a wide variety of lineman hand tools
- Metal hammer loop holds a lineman's hammer, wrenches and other long handled tools
- Robust clip on the back of the module can be handled with class 2 insulated gloves to effortlessly reorganize the Rail System to help improve workspace efficiency
- POM, Polyethylene, Impact modified Polypropylene and 1680D material to stand up to tough working conditions



BC512C

Cat. No.	UPC 0-92644+	Description	Overall Length	Overall Width	Overall Height
BC99WA	61050-9	Integrated Corner Piece	12.7" (32.5 cm)	0.9" (2.3 cm)	14" (35.6 cm)
BC100S	60152-3	Wall Assembly, S-Hook Module	12.7" (32.3 cm)	2.3" (5.8 cm)	14" (35.6 cm)
BC100WA	61037-0	1 Man Wall Assembly	19.27" (48.9 cm)	4.4" (11.2 cm)	15.94" (40.5 cm)
BC150WA	61039-4	1.5 Man Wall Assembly	22.77" (57.8 cm)	4.4" (11.2 cm)	15.94" (40.5 cm)
BC200WA	61040-0	2 Man Wall Assembly	40.27" (102.3 cm)	4.4" (11.2 cm)	15.94" (40.5 cm)
BC501C	61016-5	Hard Tool Storage Module	15.2" (38.6 cm)	4.9" (12.6 cm)	11.5" (29.1 cm)
BC502C	61036-3	Tool Apron Module	15.5" (52 cm)	2.2" (5.6 cm)	19.7" (50 cm)
BC503C	61028-8	Work Tray Module, Rail System	20.6" (52 cm)	12.2" (31 cm)	8.8" (22 cm)
BC504C	61029-5	Magnetic Tool Storage Module	3.54" (9 cm)	1.58" (4.0 cm)	8.71" (22.1 cm)
BC505C	61030-1	Open Hook Module	3.11" (7.89 cm)	2.45" (6.22 cm)	5.02" (12.7 cm)
BC506C	61031-8	Closed Hook Module	3.11" (7.89 cm)	2.45" (6.22 cm)	5.02" (12.7 cm)
BC507C	61032-5	Auger Bit Storage Module	4.1" (10.4 cm)	2.8" (7.2 cm)	21.1" (53.6 cm)
BC508C	61033-2	Utility Bar Storage Module	10.1" (25.6 cm)	3.9" (9.9 cm)	3.9" (9.9 cm)
BC509C	61034-9	Socket Storage Module	3.5" (8.9 cm)	2.2" (5.6 cm)	15.4" (39.1 cm)
BC510C	61053-0	Hardware Pouch Module, Rail System	12.8" (32.5 cm)	5.9" (15.1 cm)	10.5" (26.7 cm)
BC511C	61041-7	Large Pouch Module, Rail System	20.25" (51.4 cm)	6.7" (16.9 cm)	9.97" (25.3 cm)
BC512C	61055-4	Multi-Tool Holder Module, Rail System	8.5" (21.6 cm)	4.1" (10.4 cm)	8.5" (21.6 cm)
BC599	61041-7	Integrated Corner Piece	8.05" (20.4 cm)	8.05" (20.4 cm)	15.87" (40.3 cm)

THE LINEMAN'S OFFICE



S-HOOK MODULES



Auger Bit Storage Module

- 2 slots to store 12", 18", or 24" long auger bits
- Aluminum Spacer slides into one slot to store a 12" auger bit in the 18" holder or store an 18" long auger bit in the 24" bit holder
- Module will not melt with hot auger bits, or dull tips of auger bits
- Made with impact resistant nylon to stand up to tough working conditions



BC507S

Socket Storage Module

- 6 slots to store commonly used impact socket sizes or Klein's Impact Socket Set, sold separately (Cat. No. 66010)
- Fits a range of socket sizes from 3/8" to 1-1/8"
- Magnetic slots to keep sockets in place during transit
- Sockets are stored from smallest to largest to quickly identify the right size needed for the job
- Made with impact resistant nylon to stand up to tough working conditions



BC509S

Utility Bar Storage Module

- 10" long bar allows tools to slide in and out with ease
- Holds lineman tools including hammers, straps, ropes and long handled tools
- Made with impact resistant nylon to stand up to tough working conditions



BC508S

Tool Apron Storage Module

- 12 compartments to accommodate a wide variety of lineman tools
- Double stitched hammer loop and knife pouch helps keep tools secure when not in use
- Rare-Earth magnets hold hardware and small tools
- Innovative design intended to be more durable than traditional tool aprons
- Bonus buckle for extra storage



BC502S

Hard Tool Storage Module

- 18 compartments hold a wide variety of lineman tools
- Rare-Earth magnets hold hardware and small tools
- Innovative design intended to be more durable than traditional tool aprons
- Rubber flaps hold tools during transit and are also adjustable and replaceable
- Made with impact resistant nylon to stand up to tough working conditions



BC501S

Magnetic Tool Storage Module

- Rare-Earth magnetic plates hold hand tools, sockets, bits and small parts
- Strong enough to hold lineman's pliers
- Made with impact resistant nylon to stand up to tough working conditions



BC504S

S-Hooks

- Designed to attach to bucket lips for optimized fit to hold all S-Hook Modules



BC312



BC311

Cat. No.	UPC 0-92644+	Description	Overall Length	Overall Width	Overall Height
BC311	88013-1	S-Hook, 2"	5.49" (13.9 cm)	0.67" (1.7 cm)	6.05" (15.4 cm)
BC312	88014-8	S-Hook, 3"	5.8" (14.7 cm)	0.67" (1.7 cm)	6.3" (16 cm)
BC501S	88006-3	Hard Tool Storage Module	15.2" (38.6 cm)	4.6" (11.6 cm)	11.2" (28.5 cm)
BC502S	88007-0	Tool Apron Storage Module	15.5" (39.4 cm)	2.2" (5.6 cm)	19.5" (49.5 cm)
BC504S	88008-7	Magnetic Tool Storage Module	3.54" (9.0 cm)	1.97" (5.0 cm)	8.71" (22.1 cm)
BC507S	88009-4	Auger Bit Storage Module	4.1" (10.4 cm)	2.2" (5.6 cm)	21" (52.2 cm)
BC508S	88010-0	Utility Bar Storage Module	10.1" (25.6 cm)	3.3" (8.4 cm)	3.74" (9.5 cm)
BC509S	88011-7	Socket Storage Module	3.5" (8.9 cm)	2.2" (5.6 cm)	15.2" (38.6 cm)

View Details Online...



Patent Pending

www.kleintools.com > 800-553-4676

PERSONAL PROTECTION & SAFETY EQUIPMENT



HARD HATS

NON-VENTED CLASS E

Specifically designed with electricians and linemen in mind, these non-vented hard hats are tested up to 20kV.

Available in Cap Style and Full Brim



VENTED CLASS C

Built for the demands of general construction, plumbing, carpentry and iron worker use, these hard hats include adjustable vents that can be opened and closed. These hard hats do not provide electrical protection.

Available in Cap Style and Full Brim

SAFETY, COMFORT & FIT

- 1 Flexible, Open-Frame Design** allows suspension to conform to user's head, provides optimal fit, and improved ventilation.
- 2 Pivot Adjustment** allows user to position the ratchet mechanism to clear bandana knots and pony-tails.
- 3 Replaceable, Top Comfort Pad** Sweat-wicking and breathable padding with anti-microbial and odor control materials; machine washable. Prevents straps from digging into your head. (Replacement Cat. No. KHHTOPPAD)
- 4 Rear Neck Pad** Soft, non-slip rear pad provides excellent cushion and grip.
- 5 Multi-Point Adjustment** allows user to choose the best position for enhanced fit and comfort.
- 6 Chin Strap Attachment Points** Chin Strap is sold separately. (Cat. No. KHHSTRP)
- 7 Replaceable, Sweatband** Front and side coverage; sweat-wicking and breathable padding with anti-microbial and odor control materials; machine washable. (Replacement Cat. No. KHHSWTBND)
- 8 Ratchet Adjustment** large knob mechanism allows for easy one-hand adjustment, even with gloves on.



Hard Hats

- Patented accessory mounts on front and back ensure optional Klein Headlamps and Klein accessories attach securely and precisely, every time — no straps or zip ties needed!
- Unique suspension system features a flexible open frame design to provide optimal fit and improved air circulation
- Breathable, padded sweat-wicking sweatband and top pad improve comfort and are machine washable
- Easy, one-handed adjustment with large knob ratchet mechanism even with gloves on and soft neck pad pivots to clear bandana knots and pony tails
- Universal accessory slots on both sides for attaching hearing protection, face shield and more
- Reverse donning: Suspension can be switched to wear hard hat backwards

Non-Vented Class E, Type 1 Hard Hats

- Tested up to 20kV, meets ANSI Z89.1-2014 (R2019), CSA Z94.1-15 (R2020); EN397:2012+A1:2012-5.2.4 (Lateral Deformation-LD)*; EN12492:2012-4.2.1.2, 4.2.1.3, 4.2.1.4 (Front/Back/Side impact)

Cat. No.	Class	SKU Description
60100	E	Cap Style, Non-vented, White
60535	E	Cap Style, Non-vented, Yellow
60107	E	Cap Style, Non-vented, Alkaline Headlamp # KHH56220, White
60107RL	E	Cap Style, Non-vented, Rechargeable Headlamp #56062, White
60248	E	Cap Style, Non-vented, Blue
60249	E	Full Brim, Non-vented, Blue
60400	E	Full Brim, Non-vented, White
60406RL	E	Full Brim Non-vented, Rechargeable Headlamp #56062, White
60489	E	Full Brim, Non-vented, Yellow

Alkaline headlamp (Cat. No. KHH56220) includes 3 x AAA batteries



REVERSE DONNING

Suspension can be easily adjusted to wear hard hat frontwards or backwards. Available on both vented and non-vented hard hats.



For more details on Headlamps, Safety Lamp and Hard Hat Accessories, see pages 7-14

Vented Class C, Type 1 Hard Hats

- Class C, Type 1 hard hats with adjustable vents meet ANSI Z89.1-2014, CSA Z94.1-15; EN397:2012+A1:2012-Lateral Deformation (LD) standards*
- Adjustable vents can be opened or closed for maximum air circulation while meeting stringent safety standards

Cat. No.	Class	SKU Description
60105	C	Cap Style, Vented, White
60113RL	C	Cap Style, Vented, Rechargeable Headlamp #56062, White
60401	C	Full Brim, Vented, White
60407	C	Full Brim, Vented, Alkaline Headlamp # KHH56220, White
60407RL	C	Full Brim, Vented, Rechargeable Headlamp #56062, White
60262	C	Full Brim, Vented, Yellow

Alkaline headlamp (Cat. No. KHH56220) includes 3 x AAA batteries



Scope of Z89.1-2014 (R2019) American National Standard for Head Protection

TYPE I (Top Impact) Helmets intended to reduce the force of an impact to the top of a wearer's head.

TYPE II (Top and Lateral Impact) Helmets intended to reduce the force of an impact resulting from a blow received off-center or to the top of a wearer's head.

Electrical Performance

CLASS E (Electrical) Helmets intended to reduce the danger of exposure to high-voltage electrical conductors, proof-tested at 20,000 volts.

CLASS G (General) Helmets intended to reduce the danger of exposure to low-voltage electrical conductors, proof-tested at 2,200 volts.

CLASS C (Conductive) Helmets not intended to provide protection from electrical conductors.



HARD HATS & SAFETY HELMETS



Konstrukt™ Series Full Brim Hard Hats

- Constructed using lightweight reinforced polymer-fibers to withstand radiant heat loads of up to 350°F
- Type 1 Class G, meets ANSI/ISEA Z89.1-2014 (R2019) and CSA Z94.1-15 (R2020)
- Patented accessory mounts (on #60452) – Ensure Klein Headlamps and accessories are properly positioned on front or back; NO STRAP needed!

TYPE I, CLASS G
ELECTRICAL PROTECTION
UP TO 2KV



TESTED TO WITHSTAND RADIANT HEAT UP TO 350°F (176°C)*

*Heat resistance does not apply to headlamp



60447



60452

KARBN™ Series Full Brim Hard Hats

- Stylish, modern, durable hydro-dipped polymer film KARBN™ pattern on rugged PC/ABS composite
- Reflective stickers enhance visibility in low light environments

TYPE I, CLASS E
ELECTRICAL PROTECTION
UP TO 20KV




60345



60346

LOOK COOL; STAY COOL!

Replaceable machine washable, breathable padded blue premium sweatband and comfort top pad feature advanced evaporative technology and additional coverage. Simply wet and shake out for hours of cooling!



TYPE I, CLASS C
ADJUSTABLE SIDE VENTS HELP
MANAGE AIR CIRCULATION



60626



60347

Cat. No.	UPC 0-92644+	Description	Class
60447	60447-8	KONSTRUKT™ Series Full Brim Hard Hat With Headlamp	G
60452	60452-2	KONSTRUKT™ Series Full Brim Hard Hat (no mounts)	G
60345	60345-7	KARBN™ Full Brim Hard Hat	E
60346	60346-4	KARBN™ Full Brim Hard Hat w/Rechargeable Auto-Off Headlamp 56048	E
60626	60626-7	KARBN™ Full Brim Hard Hat, Vented	C
60347	60347-1	KARBN™ Full Brim Hard Hat, Vented w/Rechargeable Auto-Off Headlamp 56048	C

ACCESSORIES			Pkg Qty
KHHSNP2	60438-6	Replacement Suspension for KARBN™ Full Brim Hard Hats	1 pc.
KHHSWTBND2	60437-9	Replacement Premium Cooling Sweatband, Blue	3-pack
KHHTOPPAD2	60436-2	Replacement Premium Top Pad, Blue	3-pack
KHHSWTBND	60089-0	Replacement Sweatband	3-pack
KHHTOPPAD	60088-3	Replacement Top Pad	3-pack

Featured Headlamp (also sold separately)			
56048	56048-4	Rechargeable Auto-Off Headlamp, 400 Lumens (incl with 60346, 60347)	1 pc.
56062	56062-0	Rechargeable Headlamp/Magnetic Worklight (included on select models)	1 pc.
56063	56063-7	Quad-directional Safety Lamp (Rechargeable; Magnetic; RED LEDs)	1 pc.
60156	60156-9	Intrinsically Safe LED Headlamp	1 pc.
60155	60155-2	Cooling Fan for Hard Hat and Safety Helmet	1 pc.

NOTE: KHHSNP2 does not come with Premium top pad (KHHTOPPAD2) and Premium Sweatband (KHHSWTBND2), these items need to be purchased separately.



KHHSNP2



KHHSWTBND2



KHHTOPPAD2



KHHTOPPAD



KHHSWTBND



56062



56063



60156



60155



Safety Helmets

- Patented front/back accessory mounts ensure Klein Headlamps attach securely
- 6-point suspension along with chin strap provide improved stability and secure fit when tilting your head
- Breathable padded sweat-wicking sweatband and comfort top pad are machine washable
- Easy, one-handed adjustment with large knob ratchet mechanism
- Detachable 4-point padded chin strap for comfortable secure fit
- These Helmets meet: Type I ANSI/ISEA Z89.1-2014 (R2019), CSA Z94.1-15 (R2020): Class E non-vented Safety Helmets have been tested up to 20kV.
EN397:2012+A1:2012 (Clauses listed only):
 - 5.2.1 – Shock at Very Low Temperature
 - 5.2.4 – Lateral Deformation (LD)
 - 5.2.5 – Molten metal Splash
 EN12492:2012 (Listed clauses only):
 - 4.2.1.2 – Front Energy Absorption Capacity
 - 4.2.1.3 – Side Energy Absorption Capacity
 - 4.2.1.4 – Rear Energy Absorption Capacity
 - 4.2.2 – Resistance To Penetration
 - 4.2.3 – Retention System Strength
 - 4.2.4 – Retention System Effectiveness (roll off)



60515



60516



60517



60145



60147



60149



60150



60146



60148

Cat. No.	Description	Venting	Shell Color
60145	Safety Helmet, Non-Vented- Class E	—	White
60146	Safety Helmet w/Rech Headlamp #56062, Non-Vented- Class E	—	White
60147	Safety Helmet, Non-Vented-Class E	—	Blue
60148	Safety Helmet w/Rech Headlamp #56062, Non-Vented- Class E	—	Blue
60149	Safety Helmet, Vented-Class C	Adjustable Vents	White
60150	Safety Helmet w/Rech Headlamp #56062, Vented-Class C	Adjustable Vents	White
60515	Non-Vented KARBN Safety Helmet w/56062 Rechargeable Headlamp	—	Black with KARBN™ Hydrographic Pattern
60516	KARBN Vented Safety Helmet	Adjustable Vents	
60517	KARBN Vented Safety Helmet w/56062 Rechargeable Headlamp	Adjustable Vents	



Safety Helmet Visors

Designed with lightweight materials and vents for adequate ventilation offer long term comfort, specifically to fit Klein Tools Safety Helmets only (Cat. Nos. 60145, 60146, 60147, 60148, 60149, 60150).

- Superior Impact Protection: Tested to the latest ANSI Z87.1+ (2020), CSA Z94.3-20 and MIL-PRF-32432A Clause 3.8.4.1 (Class 1-ballistics fragmentation) standards (See instructions for details)
- High Clarity Visor: Optical Class-1
- Anti-fog
- Scratch Resistant
- UV Protection: effectively blocks 99.9% harmful UV-A, UV-B, and UV-C rays
- Locks in up and down position to maintain desired position when moving head



VISORCLR



VISORGRAY

VISORS FOR SAFETY HELMETS

Cat. No.	Window Dimensions	Lens Color	Material
VISORCLR	7" (17.8 cm) x 4" (10.1 cm)	Clear	Polycarbonate
VISORGRAY	7" (17.8 cm) x 4" (10.1 cm)	Gray Tint	Polycarbonate

HARD HAT & SAFETY HELMET ACCESSORIES



Hard Hat & Safety Helmet Replacement Parts and Accessories

● Hard Hat Suspension (Cat. No. KHHSPPN)

- Hard Hat Suspension features flexible open frame design easily conforms to your head, allowing maximum ventilation
- Ratchet-knob adjustment; easy one-hand adjustment, even with work gloves on
- 4-point suspension; multi-level height adjustment
- Adjustment size: Hat sizes 6.5 to 8 (52 to 64 cm)
- Fits both cap and full brim style hard hats

KHHTOPPAD





KHHSPPN

● Hard Hat & Safety Helmet Replacement Sweatband (Cat. No. KHHSWTBND)

● Hard Hat & Safety Helmet Replacement Top Pad (Cat. No. KHHTOPPAD)

- Built with durable padded materials; enhances long-term comfort by reducing pressure on the head
- Sweat-wicking and odor control properties to improve cooling and maintain freshness longer
- Extended coverage: wicks away sweat from forehead and the side of your head
- Replaceable and machine washable to stay fresh and reuse multiple times

KHHSWTBND



KHHSTRP

● Hard Hat Chin Strap (Cat. No. KHHSTRP)

- Helps keep hard hats in place during high winds, at height, or unusual work positions
- Multi-point attachment to Klein Tools Hard Hat Suspension with 4 clips
- Easily adjusts for personalized comfort and fit

CLMBRSPN*

*Shown with top pad and sweatband, all sold separately.



CLMBRSTRP

● Safety Helmet Suspension (Cat. No. CLMBRSPN)

- 6-point suspension (Cat. No. CLMBRSPN) features flexible open frame design and ratchet-knob adjustment for a secure fit
- Ratchet-knob adjustment; easy one-hand adjustment, even with work gloves on
- 6-point suspension; multi-level height adjustment

● Safety Helmet Chin Strap (Cat. No. CLMBRSTRP)

- Chin Strap (Cat. No. CLMBRSTRP) helps keep safety helmets in place during high winds, at height, or in confined work positions with multi-point attachments; detachable and replaceable

Cat. No.	Description	Package Quantity
KHHSPPN	Hard Hat Replacement Suspension	1
KHHTOPPAD	Hard Hat Replacement Top Pad	3
KHHSWTBND	Hard Hat Replacement Sweatband	3
KHHSTRP	Hard Hat Chin Strap	1
CLMBRSPN	Safety Helmet Suspension	1
CLMBRSTRP	Safety Helmet Chin Strap	1

Cooling Fan for Klein Hard Hats and Safety Helmet

- Cooling Fan has powerful dual-fan design for efficient airflow on head, neck or face
- Up to 6 hours continuous runtime via Modular Rechargeable Battery Cat. No. 29025 (included)
- Modular design offers 16 ways to cool face, neck or under shell with long ducts or short ducts (included)



Cat. No.	UPC 0-92644+	SKU Description
60155	60155-2	Hard Hat/Safety Helmet Cooling Fan
Replacement Parts		
29025	29025-1	Modular Battery Li-ion (3200mAh)
60490	60490-4	Duct and Cable Replacement Kit

Hard Hats/Safety Helmets sold separately

HARD HAT SAFETY HELMET LIGHTING ACCESSORIES

FL 1 STANDARD		
300 Lumens	215 Lumens	100 Lumens
4h	9h	14h

Rechargeable Headlamp and Worklight

- Rechargeable headlamp attaches directly to Klein® Hard Hats (equipped with bracket system)
- Mount headlamp magnetically with a strong backside magnet for use as a work light
- Battery gauge indicates level of battery life with colored LED lights
- Slimmer profile light with pivoting mount allows up to a 64° lighting angle



56062



Cat. No.	Description	Lumens	Battery Life	Batteries	Drop Protection
56062	Rechargeable Headlamp and Worklight, 300 Lumens All-Day Runtime	Boost: 300 High: 215 Low: 100	4 hrs 9 hrs 14 hrs	Lithium-Ion	6' (1.8 m)

FL 1 STANDARD	
216 Lumens	75 Lumens
5h	12h

Intrinsically Safe LED Headlamp

- LED Headlamp Standards tested: UL913 7th edition (US and Canada), CSA 22.2 No. 157-92, Reaffirmed 2012, CLASS I, DIV 1 and 2, GRP ABCD; CLASS II, DIV 1 and 2, GRP EFG; CLASS III; TEMP CODE: T4
- Intrinsically safe LED headlamp attaches directly to Klein® Hard Hats and Safety Helmets equipped with Klein® accessory mount
- Bracket tilt angle up to 70° on hard hats (max 90°)
- Pressure relief valve (on bottom)
- Large power / mode button
- Includes 1" (2.5 mm) Hex Key for covered battery compartment



60156



Cat. No.	Description	Lumens	Battery Life	Batteries	Drop Protection
60156	Intrinsically Safe LED Headlamp	High: 216 Low: 75	5 hrs 12 hrs	3xAAA (included)	6.6' (2 m)

FL 1 STANDARD	
LOW HIGH	LOW HIGH
52h 10h	22h 5h

Rechargeable Safety Lamp with Magnet

- Focused quad-directional multi-LED is visible up to 1/4 mile (0.4 km) in low light and clear weather
- Designed to attach directly to Klein® Hard Hats and Safety Helmets with patent-pending front/back accessory mounts; no straps needed
- Attach to magnetic surface to serve as stationary alert beacon
- Compact and lightweight design for all day use
- High Quality Red LEDs for exceptional visibility in BOTH bright and low light conditions
- Rechargeable via USB-C cable (included)
- Battery status indicator



56063

Cat. No.	Description	Modes	Battery Life	Batteries	Drop Protection
56063	Rechargeable Safety Lamp with Magnet	Pulse: Low Pulse: High Solid On: Low Solid On: High	52 hrs 10 hrs 22 hrs 5 hrs	Lithium-Ion	10' (3 m)

See www.kleintools.com for all details on hard hat Safety Lamp and Intrinsically Safe Headlamp.



FL 1 STANDARD	
Spotlight	
Boost	800 Lumens 4hr
High	600 Lumens 8hr
Low	300 Lumens 10hr
Strobe	100 Lumens 40hr

Floodlight	
High	500 Lumens 5hr
Med	250 Lumens 10hr
Eco	30 Lumens 27hr

Red LED	
Solid	2.5 Lumens 56hr
Strobe	2.5 Lumens 160hr

10 ft	IP65
-------	------

Rechargeable 2-Color LED Headlamp with Adjustable Strap

- Rechargeable Headlamp is 3 lights in one: Focused Spotlight; Wide Floodlight, and low-intensity red LEDs
- Remove light from bracket for recharging or to attach directly to Klein® Hard Hat mounts
- Silicone infused adjustable strap features marker/pencil holder



56414

Cat. No.	Description	Overall Length	Material	Drop Protection
56414	Rechargeable 2-Color LED Headlamp with Adjustable Strap	2.9' (7.3 cm)	ABS/PC, Silicone Weave in Nylon Elastic Fabric	10' (3 m)

FL 1 STANDARD	
400 Lumens	4h
200 Lumens	12h
100 Lumens	22h
6 ft	IP54

Rechargeable 400 Lumen Headlamp with Silicone Strap

- Rechargeable 400 lumen LED Headlamp has 3 bright lighting modes and long, all-day battery life
- Headlamp automatically turns off after 3 minutes in bright light via auto-sensing technology, extending battery life (feature can be disabled)
- Battery gauge indicates level of battery life with colored LED lights
- Wear with the adjustable silicone strap or the smartly designed bracket that attaches directly to Klein® Hard Hats (those equipped with bracket system)
- Slim profile with pivoting mount to allow up to a 64° lighting angle



56064

Cat. No.	Description	Lumens	Battery Life	Batteries	Drop Protection
56064	Rechargeable Headlamp w/ Silicone Strap, 400 L All-Day Runtime, Auto-Off	Boost: 400 High: 200 Low: 100	4 hrs 12 hrs 22 hrs	Lithium-Ion	6' (1.8 m)

FL 1 STANDARD	
400 Lumens	4h
200 Lumens	12h
100 Lumens	22h
6 ft	IP54

Rechargeable 400 Lumen Headlamp with Fabric Strap

- Rechargeable 400 lumen LED Headlamp has 3 bright lighting modes and up to 22 hours of runtime
- Headlamp automatically turns off after 3 minutes in bright light via auto-sensing technology, extending battery life
- Battery gauge indicates level of battery life with colored LED lights
- Smartly designed headlamp bracket also attaches directly to Klein® Hard Hats equipped with bracket system
- Slim profile with pivoting mount to allow up to a 64° lighting angle



56048

Cat. No.	Description	Lumens	Battery Life	Batteries	Drop Protection
56048	Rechargeable Headlamp with Strap, 400 Lumen All-Day Runtime, Auto-Off	Boost: 400 High: 200 Low: 100	4 hrs 12 hrs 22 hrs	Lithium-Ion	6' (1.8 m)

FL 1 STANDARD	
260 Lumens	9h
125 Lumens	14h
6 ft	IP54

Rechargeable Light Array Headlamp with Fabric Strap

- Rechargeable headlamp with a rectangular light array offers more usable light field
- Adjustable fabric strap with silicone grip comes equipped with a convenient marker and carpenter's pencil holder
- Mounts magnetically with a strong backside magnet for use as a work light
- Smartly designed headlamp bracket also attaches directly to Klein® Hard Hats equipped with bracket system
- Battery gauge indicates level of battery life with colored LED lights



56049

Cat. No.	Description	Lumens	Battery Life	Batteries	Drop Protection
56049	Rechargeable Light Array Headlamp w/ Strap, 260 Lumen, All-Day Runtime	High: 260 Low: 125	9 hrs 14 hrs	Lithium-Ion	6' (1.8 m)

FL 1 STANDARD	
300 Lumens	4h
215 Lumens	9h
100 Lumens	14h
6 ft	IP54

Rechargeable Hard Hat Headlamp and Worklight

- Rechargeable headlamp attaches directly to Klein® Hard Hats (equipped with bracket system, Smartly designed headlamp also attaches to Klein® bracketed strap (Cat. No. 56060)
- Colored LED Battery gauge indicator, 64° pivoting, and Rear-side magnet for mounting and use as a work light




56062

Cat. No.	Description	Lumens	Batteries	Battery Life
56062	Rechargeable Hard Hat Headlamp and Worklight	Boost: 300 Spot/High: 215 Flood/Low: 100	Lithium-Ion Rechargeable via USB-C port	Boost: 4 hrs. Spot/High: 9 hrs. Flood/Low: 14 hrs.



See www.kleintools.com for all details on hard hat Safety Lamp and Intrinsically Safe Headlamp.

FL 1 STANDARD Telescoping Magnetic LED Pickup Tool



- Telescoping extension 24" (61 cm) beyond arm's reach to retrieve magnetically-attractive tools and parts
- Powerful magnetic head with 2 lb (907 g) pickup strength
- LED light provides long-lasting illumination to guide you to and from your target
- 3" (7.5 cm) gooseneck end bends to aid with pickup and to work around obstacles
- Pocket clip for easy, convenient storage




56027

Easily locate and retrieve tools in tight spaces



Cat. No.	Dimensions	Lumens	Battery Life	Batteries	Drop Protection
56027	6.31" x .938" W (16 x 2.4 cm) CLOSED 27.81" x .938" W (70.6 x 2.4 cm) OPEN	25	10 hrs	2x AAA (included)	10' (3 m)

FL 1 STANDARD Cap Visor LED Light



- Contoured metal clip on this cap light fastens easily onto the hat brim or visor
- Five bright LEDs flood the area with light
- Pivoting light head allows up to a 60° lighting angle
- Conveniently centered power button controls the light from high to low to off




56402

Provides hands-free illumination



Cat. No.	Dimensions	Lumens	Battery Life	Batteries	Drop Protection
56402	2.57" L x 2.27" W (6.5 cm x 5.8 cm)	High: 125 Low: 40	High: 4 hrs Low: 8 hrs	2x AAA (included)	10' (3 m)

FL 1 STANDARD Rechargeable LED Flashlight with Worklight

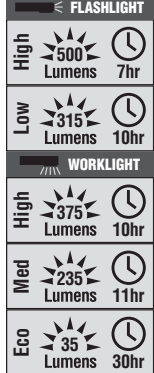

- Rechargeable Flashlight with integrated work light is a compact, powerful every day light offering 5 different light modes
- Features two Flashlight modes: High 500 lumens for 7 hours, Low 315 lumens for 10 hours; three Work Light modes: High-375 lumens for 10 hours, Medium- 235 lumens for 11 hours, and ECO- 35 lumens for 30 hours
- Magnetic end cap and side-barrel LEDs for a hands-free work light
- Equipped with Last Mode Memory so the light turns on in the same mode it was turned off
- Tri-color LED light indicates the battery life and the charging collar twists for recharging via an included USB-C cable
- Glow ring locator on the bezel charges when the flashlight is on



56412



Cat. No.	Dimensions	Batteries	Drop Protection
56412	5.5" L x 1.4" W (14 cm x 3.6 cm)	Lithium-Ion	6' (1.8 m)

FL 1 STANDARD Rechargeable 2-Color LED Flashlight with Holster



- Rechargeable Flashlight is 3 lights in 1: a focused, long-range white spotlight, wide, white floodlight, and low-intensity red LEDs
- Features bright white LEDs in 2 settings: Spotlight (Boost: 1000 lm for 4 hrs, High: 800 lm for 7 hrs, Low-400 lm for 11 hrs, Strobe: 95 lm for 50 hrs) and Floodlight (High-650 lm for 6 hrs, Medium: 450 lm for 11 hrs, ECO: 35 lm for 25 hrs)
- Low intensity red LEDs for non-blinding night vision (4 lumens for 48 hours) also feature a long-lasting red strobe (4 lumens for 96 hours)
- Magnetic end cap for a hands-free work light
- Both a holster to be secured on a belt or backpack and removable low-carry pocket clip



56413

Cat. No.	Dimensions	Batteries	Drop Protection
56413	6.3" L x 1.3" W (16 x 3.3 cm)	Lithium-Ion	6' (1.8 m)

FL 1 STANDARD Alkaline Headlamp with Silicone Strap



- Anti-slip silicone strap keeps headlamp securely fastened to hard hat
- Strap comes pre-adjusted for quick fit to hard hat
- 45° tilt for varied beam direction to point light where it is needed most



56220

Cat. No.	Lumens	Batteries	Battery Life	Drop Protection
56220	Spotlight: 150 Floodlight: 50	3x AAA (included)	Spotlight: 6 hrs Floodlight: 10 hrs	6' (1.8 m)

Headlamp Bracket with Fabric Strap

- Bracket attaches directly to Klein® headlamps equipped with mounting bracket
- Comfort fabric strap grips to fit comfortably on your head and stays securely on a hardhat or cap
- Includes a marker/carpenter pencil holder



56060

Cat. No.	Overall Length	Material
56060	24" (61 cm)	ABS/PC, Silicone Weave in Nylon Elastic Fabric



Safety Glasses

High-Quality protective eyewear that feature an anti-fog coating that won't wear off. Scratch resistant lenses with UV protection block 99.9% of harmful UV rays.

- Superior impact protection: impact tested to the latest ANSI Z87.1+, CSA Z94.3 and MIL-PRF-32432A Clause 3.8.4.1 (Class 1-ballistics fragmentation) MILITARY STANDARDS
- UV Protection: Tested to ANSI Z87.1 U6 standard, which effectively blocks 99.9% harmful UV rays
- Non-slip fit; rubber nose piece and temple tips for secure fit and grip
- True Color Recognition
- Optional Breakaway Lanyard (Cat. No. 60177) and Hard Case (Cat. No. 60176) both sold separately

STANDARD SEMI-FRAME, NARROW LENS



60159



60160

PRO SEMI-FRAME, WIDE LENS



60161



60162

PRO FULL-FRAME, WIDE LENS



60163



60164

MIL-PRF-32432A
Clause 3.8.4.1
Class 1

CSA
Z94.3

ANSI
Z87.1+



Cat. No.	Description
Standard Semi-Frame	
60159	STD EYEWEAR SEMI FRAME, CLEAR LENS
60160	STD EYEWEAR SEMI FRAME, GRAY LENS
PRO Semi Frame	
60161	PRO EYEWEAR SEMI FRAME, CLEAR LENS
60162	PRO EYEWEAR SEMI FRAME, GRAY LENS
60536	PRO EYEWEAR SEMI FRAME, Indoor/Outdoor LENS
PRO Full Frame	
60163	PRO EYEWEAR FULL FRAME, CLEAR LENS
60164	PRO EYEWEAR FULL FRAME, GRAY LENS
60537	PRO EYEWEAR FULL FRAME, Indoor/Outdoor LENS
60539	PRO EYEWEAR FULL FRAME, POLARIZED LENS
PRO Full Frame GASKET	
60470	PRO EYEWEAR FULL FRAME, CLEAR LENS GASKET
60471	PRO EYEWEAR FULL FRAME, GRAY LENS GASKET
60538	PRO EYEWEAR FULL FRAME, Indoor/Outdoor LENS GASKET
Multi-Packs; Combo Packs (Dual Packs and Combo Packs Available!)	
60171	STD EYEWEAR SEMIFRAME, CLEAR, 2 PK
60172	PRO EYEWEAR SEMIFRAME, CLEAR, 2 PK
60173	PRO EYEWEAR SEMIFRAME, CLEAR AND GRAY, 2 PK
60174	STD EYEWEAR SEMIFRAME, CLEAR AND GRAY, 2 PK
Accessories	
60483	PRO Full Frame Gasket and Strap Replacement Kit

GASKET FULL FRAME W/STRAP



60470



60471

INDOOR/OUTDOOR LENS



60536



60537



60538

POLARIZED LENS



60539

Warning statement: Visit www.kleintools.com for safety warnings. *Does not apply to Gasket models

Breakaway Lanyard for Safety Glasses

- SECURITY: Lanyard with snap design and breakaway force of 3-Pound ensures quick release in case of an emergency
- TOUGH: Synthetic braided fiber design adds strength and long term durability
- CONVENIENCE: Easily adjustable loops allow you to attach to a wide variety of eyewear



60177

Cat. No.	Description	Color
60177	Breakaway Lanyard for Safety Glasses	Black

Safety Glasses Hard Case

- Semi-rigid lightweight construction is built tough to help protect your eyewear from drops, bumps and impacts
- High quality, premium soft interior to ensure safety eyewear does not get scratched
- Designed to hold any model of Klein Tools safety eyewear




60176

Cat. No.	Description	Color
60176	Safety Glasses Hard Case	Black

Hard Hat Earmuffs

- Earmuffs designed for use with Full Brim Hard Hats (60502), Klein Tools Cap Style Hard Hats, and Safety Helmets (60532)
- Noise Reduction Rating (NRR): Full Brim (26dB), Cap Style (27dB), Safety Helmet (26dB)
- Soft foam ear cushions for effective acoustic seal and all-day wear



60502



60532

Cat. No.	Description	Color
60502	Hard Hat Earmuffs, Full Brim Style	Black
60532	Hard Hat Earmuffs for Cap Style and Safety Helmets	Black

Foam Earplugs

- Noise Reduction Rating (NRR) of 33 decibels
- Soft foam for comfortable, all-day wear
- Designed to fit a wide range of ear canals
- Disposable and latex-free



60540



6054010



6054050

Cat. No.	Description	Color
6054010	Foam Earplugs, 10 pr. (in Resealable Pouch)	Orange
6054050	Foam Earplugs, 50 pr. (in Dispenser Box)	Orange



Heavy Duty Knee Pad Sleeves

- Heavy Duty Knee Pad Sleeves can be worn under or over pants for all day wear
- Triple layer protection with interior neoprene foam padding for all-day comfort
- Ergonomically engineered flexible padding with anti-abrasion layer contours to leg shape for ultimate comfort
- Unique design keeps knee pads close to the body for a second-skin fit allowing for agility when working in tight spaces
- Lightweight, breathable mesh back to keep you cool and comfortable
- Elastic cuff with slip-resistant silicone helps knee pads stay in place
- Sold in pairs and offered in three sizes for any jobsite or weekend task that puts pressure on the knees



Cat. No.	Description	Overall Length	Overall Height	Overall Width
60615	Heavy Duty Knee Pad Sleeves, S/M	14.6" (37.9 cm)	0.75" (2 cm)	6.9" (17.5 cm)
60511	Heavy Duty Knee Pad Sleeves, M/L	14.6" (37.9 cm)	0.75" (2 cm)	7.7" (19.6 cm)
60611	Heavy Duty Knee Pad Sleeves, L/XL	14.6" (37.9 cm)	0.75" (2 cm)	8.5" (21.6 cm)

Lightweight Knee Pad Sleeves


- Lightweight Knee Pad Sleeves can be worn under or over pants for all day wear
- Flexible EVA knee pad contours to leg shape for seamless comfort
- Unique design keeps knee pads close to the body for a second-skin fit allowing for agility when working in tight spaces
- Lightweight, breathable mesh back to keep you cool and comfortable
- Elastic cuff with slip-resistant silicone helps knee pads stay in place
- Perfect for the jobsite and weekend tasks
- Sold in pairs and offered in three sizes



Cat. No.	Description	Overall Length	Overall Height	Overall Width
60614	Lightweight Knee Pad Sleeves, S/M	12.6" (32 cm)	1.6" (4.1 cm)	6.9" (17.5 cm)
60492	Lightweight Knee Pad Sleeves, M/L	12.6" (32 cm)	1.6" (4.1 cm)	7.7" (19.6 cm)
60592	Lightweight Knee Pad Sleeves, L/XL	12.6" (32 cm)	1.6" (4.1 cm)	8.5" (21.6 cm)

Heavy Duty Hinged Knee Pads

- Heavy Duty Hinged Knee Pads contain a gel and foam padded pocket to maximize pressure distribution for all day comfort
- Large knee pad surface provides stability and rounded edges provide agility when moving side to side
- Hinged thigh strap keeps knee pads in place during use
- Adjustable quick-fasten buckle plus hook and loop strap provides secure fit
- Heavy duty stitching, hard plastic, and metal rivets for durability
- Perfect for jobsites that require heavy duty protection for the knees
- Sold in pairs



Cat. No.	Description	Overall Length	Overall Height	Overall Width
60491	Heavy Duty Hinged Knee Pads	14.3" (36.3 cm)	5.8" (14.7 cm)	7" (17.8 cm)

Lightweight Gel Knee Pads

- Slip resistant rubber caps to grip kneeling surface for enhanced stability and balance
- Designed to disperse pressure and reduce fatigue while providing lightweight comfort and protection
- Cinch-tight straps provide comfortable, snug fit
- Knee pads are sold in pairs



Cat. No.	Overall Length	Overall Height	Overall Width
60184	6" (15.2 cm)	12" (30.5 cm)	6" (15.2 cm)

Hinged Gel Knee Pads

- Designed with a top strap positioned above the knee to reduce shifting and to keep the knee pad centered
- Lightweight multi-layer pressure absorbing gel padding system provides heavy duty knee support for all-day comfort
- Durable slip-resistant rounded synthetic rubber kneecaps grip work surfaces for ultimate stability while allowing side-to-side mobility
- Adjustable elastic straps allow you to dial in a custom fit and quick-release clips secure upper and lower straps for easy on/off



Cat. No.	Overall Length	Overall Height	Overall Width
60344	10.7" (27.3 cm)	3.5" (8.9 cm)	9.8" (24.9 cm)

TRADESMAN PRO™ Kneeling Pads

- 1" (2.5 cm) thick, resilient NBR foam protects your knees
- Kneeling pad won't stay compressed, it bounces back to original form
- Chamfered safety edge with orange stripes provides visual and tactile awareness of edge (Cat. No. 60136)
- Large size allows you to move without moving the pad each time

Cat. No.	Description	Material	Color	Overall Length	Overall Width	Overall Height
60135	Tradesman Pro™ Standard Kneeling Pad	NBR Foam	Black	21" (53.3 cm)	1" (2.5 cm)	14" (35.6 cm)
60136	Tradesman Pro™ Large Kneeling Pad	NBR Foam	Black	28" (71.1 cm)	1" (2.5 cm)	16" (40.6 cm)



PERSONAL PROTECTIVE EQUIPMENT (PPE)




Warming Gear

- Wear under hard hats or alone
- Machine washable
- One size fits most



Cooling Gear

- Activate with water and stays cool for hours
- Wear under hard hats or alone
- Machine washable and reusable

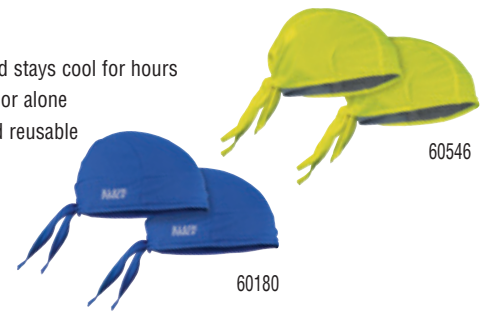

Cat. No.	Description	Color	Package Quantity	Special Feature	Size	Overall Length
60388	Heavy Knit Hat	Black	1	Extra warmth with heavy knit; vintage Klein Tools logo	One Size Fits Most	10" (25.4 cm)
60391	Knit Beanie	Black	1	Fleece lining; high-visibility yellow trim	One Size Fits Most	10" (25.4 cm)
60383	Winter Helmet Liner	Black	1	Polar fleece on crown; windproof fabric around ears	One Size Fits Most	11" (27.9 cm)
60568	Heavy Knit Hat	High-Visibility Yellow	1	Extra warmth with heavy knit; Klein Tools patch logo	One Size Fits Most	10" (25.4cm)
60569	Heavy Knit Hat	Black	1	Extra warmth with heavy knit; Klein Tools leather logo	One Size Fits Most	10" (25.4cm)
60546	Cooling Do Rag	High-Visibility Yellow	2	Elastic headband with absorbent terry cloth	One Size Fits Most	Adjustable
60180	Cooling Do Rag	Blue	2	Elastic headband with absorbent terry cloth	One Size Fits Most	Adjustable

Touch-Screen Work Gloves with Cut-Level Resistance

- Touchscreen-capable fingertips keep you connected on the jobsite
- Nitrile dip technology for superior grip
- Thumb reinforcement for extra protection
- Seamless knit cuff for comfortable fit
- Machine washable



Cat. No.	Cut-Level	Standard	Color	Size	Package Quantity
60185	2	ANSI A2 Cut Resistance; E N 388: 2015 4342 B	Gray Knit, Black Coating, Orange Cuff Thread	Large (9)	2-Pair
60197				Extra-Large (10)	
60186	4	ANSI/ISEA 105-2016 Cut Level A4; EN 388: 2015 4442 D	High-Visibility Yellow Knit, Black Coating, Orange Cuff Thread	Large (9)	2-Pair
60198				Extra-Large (10)	

Thermal Dipped Gloves

- Winter gloves are double dipped and terry lined for protection and warmth in cold weather
- Coated with latex shell for water resistance
- Second coating of textured latex on palm and fingers for superior grip
- Thick lining of 7-Gram brushed acrylic to retain warmth
- Tear and abrasion resistant while still maintaining flexibility for great dexterity
- Ribbed-knit cuff for secure fit
- Machine washable



Cat. No.	Standard	Color	Size	Package Quantity
60389	EN388-2016 2131X; EN511:2006 X1X	Gray Knit, Black Coating, Orange Trimmed Cuff	Large (9)	1-Pair
60390	EN388-2016 2131X; EN511:2006 X1X	Gray Knit, Black Coating, Black Trimmed Cuff	Extra-Large (10)	

Winter Thermal Gloves

- Winter gloves constructed with Thinsulate™ lining for protection and warmth in cold weather
- Helps hands stay dry and warm with the water resistant liner
- Maintain dexterity with the synthetic leather palm
- Stretch knit fabric for flexibility through knuckles and fingers

Cat. No.	Size
60618	Small
60619	Medium
60620	Large
60621	Extra Large



TRADESMAN PRO™

Wire Pulling Gloves

- Touchscreen capability on index finger
- Neoprene wrist closure for comfort
- Great gripping ability
- Slim fit for better dexterity

Cat. No.	Size
40232	Medium
40233	Large
40234	Extra Large



Lineman Work Gloves

- 4" Neoprene cuff with side vents
- Soft grain leather construction with reinforced leather patches
- Double-row padded knuckle for durability
- Black spandex back with Klein Lineman logo patch

Cat. No.	Size
40080	Medium
40082	Large
40084	Extra-Large
40086	Extra Extra-Large



Leather Work Gloves

- Genuine professional-grade goatskin leather
- Knuckle and finger protection with PVC guards
- EVA foam padding on palms for extra comfort
- Hook and loop closure on cuff strap provides snug fit
- Mesh back for breathability and ergonomic shape for dexterity




Cat. No.	Size
60188	Large
60189	Extra-Large



PARALLEL JAW GRIP

Wide Range Distribution Grip

- Large opening in the handle accommodates a wide variety of hooks on hoists, winches and tackle blocks
- Holds a wide range of Bare Copper, Aluminum and ACSR cable
- 50% lighter with one handed grip action
- Patent pending design



Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Color	Jaw Length	Weight
5000 lb (2268 kg) Maximum Safe Load								
16477-24	EHS	0.162" to 0.883" (4.11 to 22.42 mm)	—	●	—	Black	3.31" (8.4 cm)	2.9 lb (1.3 kg)

CHICAGO™ GRIPS

Bell System B, L, and H — 1628, 1684 and 1692 Series


- All are equipped with chain, toggle and shackle - keeps the grip from falling off of cable



Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Jaw Length	Weight
8,000 lb (3,629 kg) Maximum Safe Load								
16845CAT	Aircraft, EHS, Messenger, Guy Strand	0.218" to 0.55" (5.54 to 13.97 mm)	—	●	●	Aggressive	5" (12.7 cm)	6.9 lb (3.12 kg)
1692-5AT	Steel Strand	0.218" to 0.55" (5.54 to 13.97 mm)	—	●	●	Double V	5" (12.7 cm)	6.6 lb (2.99 kg)
15,000 lb (6,803 kg) Maximum Safe Load								
1628-16AT	Aircraft, EHS, Messenger, Guy Strand	0.31" to 0.62" (7.87 to 15.75 mm)	—	●	●	Double V	7.25" (18.4 cm)	15.8 lb (7.17 kg)

Bare Wire — 1613 Series

- Designed for working with solid and stranded bare wire from 0.08" (2 mm) to 0.20" (5.1 mm)
- Lightweight, cost-effective grip
- Single "V" groove jaw



Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Jaw Length	Weight
1,500 lb (680 kg) Maximum Safe Load								
1613-30	Copper, Steel, ACSR	0.08" to 0.20" (2.03 to 5.08 mm)	—	●	●	Single V	3" (7.6 cm)	1.5 lb (0.7 kg)

STEEL STRAND – HAVEN'S™ GRIPS

1604 Series



- Designed for use when light, compact grip is desired and where cable deformation is not a factor
- Gripping pressure of the knurled jaw is applied to 1/4" (6.35 mm) cable area



Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Weight
5,000 lb (2,268 kg) Maximum Safe Load							
1604-20	Messenger and Guy Strand	0.125" to 0.5" (3.18 to 12.70 mm)	—	—	—	Aggressive	2.2 lb (1.0 kg)

1625 Series

- Designed for use when light, compact grip is desired and where cable deformation is not a factor
- Gripping pressure of the knurled jaw is applied to 1/4" (6.35 mm) cable area
- All 1625 series have a swing latch to help hold cable in the jaw



Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Weight
2,000 lb (907 kg) Maximum Safe Load							
162520-114	Wire Rope	0.75" to 1.25" (19.05 to 31.75 mm)	—	—	—	Aggressive	3.7 lb (1.7 kg)
8,000 lb (3,629 kg) Maximum Safe Load							
162520-7/8	Wire Rope	0.38" to 0.88" (9.65 to 22.35 mm)	—	—	—	Aggressive	3.4 lb (1.5 kg)

WIRE PULLING GRIPS WARNINGS

⚠️ **WARNING:** Grips are to be used for temporary installation, not for permanent anchorage.

⚠️ **WARNING:** When used on/or near energized lines, ground, insulate, or isolate grip before pulling.

⚠️ **WARNING:** Do not exceed rated capacity.

⚠️ **WARNING:** Always match proper size and type of grip to application.

⚠️ **WARNING:** Before each use, clean jaw area and inspect grip for proper operation to avoid slippage.



PLIERS

Pliers Core features

Precision-hardened plier head
for on-the-job toughness

Induction hardened cutting knives
for long life

Hot-riveted joint
ensures smooth action
and no handle wobble



FORGED STEEL

from Klein's US-made proprietary blend



High-Leverage Lineman's Pliers

Includes core Pliers features plus:

- 46% greater cutting and gripping power than other plier designs



D213-9NE

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Color	Handle Finish	Overall Length
D213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue	Plastic-Dipped	9.33" (23.70 cm)

High-Leverage Lineman's Pliers – Bolt-Thread Holding

Includes core Pliers features plus:

- Hinge opening holds and cleans 5/8" pole line and hardware bolts or threaded rod



D213-9NETH

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Color	Handle Finish	Overall Length
D213-9NETH	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (1.98 cm)	Dark Blue	Plastic-Dipped	9.33" (23.70 cm)

High-Leverage Diagonal-Cutting Pliers

Includes core Pliers features plus:

- Cleanly strips 12-14 AWG wire



D228-8

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Cutting Knives	Handle Color	Handle Finish	Overall Length
D228-8	0.781" (1.98 cm)	1.25" (3.18 cm)	0.46" (1.17 cm)	Standard	Red	Plastic-Dipped	7.98" (20.27 cm)

High-leverage, Angled-Head Diagonal Cutting Pliers

Includes core Pliers features plus:

- Angled head design for easy work in confined spaces
- 36% greater cutting and gripping power than other plier design



D238-8

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Cutting Knives	Handle Color	Handle Finish	Overall Length
D238-8	0.813" (2.07 cm)	1.25" (3.18 cm)	0.46" (1.17 cm)	Semi-Flush	Red	Plastic-Dipped	8.05" (20.45 cm)
D248-8	0.813" (2.07 cm)	1.25" (3.18 cm)	0.46" (1.17 cm)	Standard	Red	Plastic-Dipped	8.05" (20.45 cm)

Side-Cutting Long-Nose Pliers

Includes core Pliers features plus:

- Heavier design for greater cutting power
- Knurled jaws for grabbing and looping wire
- Extended handles provide added reach and greater leverage
- Curved handles provide greater tool control
- Spring-loaded action for self-opening (D203-7)



D203-6C

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Point Diameter	Knife Length	Handle Color	Handle Finish	Overall Length
D203-6	1.969" (5.0 cm)	0.688" (1.8 cm)	0.375" (1 cm)	0.094" (0.24 cm)	0.572" (1.45 cm)	Yellow	Plastic-Dipped	6.67" (16.94 cm)
D203-7	2.43" (6.17 cm)	0.688" (1.8 cm)	0.375" (1 cm)	0.094" (0.24 cm)	0.572" (1.45 cm)	Yellow	Plastic-Dipped	7.17" (18.21 cm)

Connector Crimping Pliers

Includes core Pliers features plus:

- Crimps and seats UR/UU/UG insulation displacement connectors (IDC) - Scotchlok® type connectors



D234-6

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Color	Handle Finish	Overall Length
D234-6	1.085" (2.76 cm)	0.688" (1.75 cm)	0.375" (0.95 cm)	0.6" (1.52 cm)	Yellow	Plastic-Dipped	5.86" (14.88 cm)

Scotchlok® is a registered trademark of 3M

Standard Diagonal-Cutting Pliers

Includes core Pliers features plus:

- Tapered nose for easy working in confined areas and close tip cutting



16 AWG SOLID WIRE
STRIPPING HEAD
D240-6



D240-6

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Cutting Knives	Handle Color	Handle Finish	Overall Length
D240-6	0.831" (2.11 cm)	0.74" (1.88 cm)	0.428" (1.09 cm)	Standard	Red	Plastic-Dipped	6.16" (15.65 cm)
D252-6	0.696" (1.77 cm)	0.75" (1.91 cm)	0.813" (2.07 cm)	Standard	Red	Plastic-Dipped	6.15" (15.62 cm)

Pump Pliers

- Secure tongue and groove design for non-slip grip - even with heavy pressure
- Wide range of versatile jaw positions
- Quick adjust rivet allows one handed, fast and easy adjustment of plier jaws



D502-6

Cat. No.	Jaw Capacity	Handle Color	Handle Finish	Overall Length
D502-6	0.875" (2.2 cm)	Yellow	Plastic-Dipped	6.53" (16.59 cm)
D502-10	1.75" (4.5 cm)	Yellow	Plastic-Dipped	10.02" (25.45 cm)
D502-12	2.375" (6 cm)	Yellow	Plastic-Dipped	12.19" (30.96 cm)



SCREWDRIVERS & NUT DRIVERS



Multi-Bit Screwdrivers

- On-board storage of industrial strength bits
- Cushion-Grip™ handles for greater torque and maximum control
- Available in adjustable length and ratcheting models
- Collar on Cat. No. 32305 sets ratchet direction at forward, fixed and reverse



Cat. No.	Description	Nut Driver Sizes	Phillips Bits	Slotted Bits	Square Bits	Combo Bits	TORX® Bits	Shank Length	Overall Length
32305	15-in-1 Ratcheting	1/4"	#0, #1, #2, #3	3/16" (4.8 mm) 1/4" (6.4 mm)	#1, #2	#1, #2	T10, T15, T20, T25	3.5" (8.9 cm)	8.7" (22 cm)
32308	8-in-1 Adjustable Length Stubby	1/4"	#1, #2, #3	3/16" (4.8 mm) 1/4" (6.4 mm)	#1, #2	—	—	1" to 2.75" (2.5 to 7 cm)	4.81" (12.2 cm)

*TORQ-SET® is a registered trademark of Phillips Screw Co; TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Multi-Bit Screwdriver/Nut Drivers

- Integrated screwdriver/nut driver shaft holds popular tips and converts nut driver sizes, with comfortable Cushion-Grip™ handle
- Cat. No. 32500MAG features strong, Rare-Earth magnets to securely hold bits and fasteners
- Cat. Nos. 32561 compact design features standard 1-1/4" (3.2 cm) shaft allowing easy access to tight work spaces



Cat. No.	Description	Nut Driver Sizes	Phillips Bits	Slotted Bits	Square Bits	TORX® Bits	Shank Length	Overall Length
32500	11-in-1	3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	T10, T15	3" (7.6 cm)	7.25" (18.4 cm)
32500MAG	11-in-1 Magnetic	3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	T10, T15	3" (7.6 cm)	7.8" (19.8 cm)
32500HD	11-in-1 Impact Rated Driver	1/2", 3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	T25	3.63" (9.2 cm)	8" (20.3 cm)
32477	10-in-1	5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	T10, T15	4" (10.2 cm)	7.75" (19.7 cm)
32561	6-in-1 Stubby	1/4", 5/16"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	—	—	1.266" (3.2 cm)	3.25" (8.3 cm)

TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Heavy-Duty Multi-Bit Nut Drivers

- Multiple sizes in one convenient tool
- Heavy-duty handle and shaft exceed the torque performance of regular nut drivers
- Strong, Rare-Earth magnets securely hold nuts and bolts (Cat. No. 32807MAG)
- Wrench-assist feature for added torque
- Hollow-shafts accommodate long bolts
- Color-coded band for easy identification



Cat. No.	Description	Nut Driver Sizes	Shaft Length	Overall Length
32807MAG	7-in-1	1/4", 5/16", 11/32", 3/8", 1/2", 7/16", 9/16"	4" (10.2 cm)	9.54" (24.2 cm)

INSULATED SCREWDRIVERS & NUT DRIVERS

Klein Insulated tools meet or exceed the IEC 60900:2018 and ASTM F-1505-16 standards, for insulated tools, and are clearly marked with the official 1000-volt rating symbol



All Klein Insulated Tools have orange impact and flame resistant insulation that protects from electric shock

FORGED STEEL

from Klein's US-made proprietary blend

Traditional Klein Insulated Tools house thick, exceptionally tough, high-dielectric white inner coating that is bonded to the tool

Durable, two layer, molded insulation is unique to Traditional Klein Insulated Tools

Cushion-Grip™ handles for greater torque and comfort

Tip-Ident™ quickly identifies size

Slim-tip Insulated Tools allow greater access into tight spaces



WRENCHES & FLIP SOCKETS

Lineman's Ratcheting Wrenches

- Bolt-through design allows bolts to pass through the socket
- 3/4" x 13/16", 1" x 1-1/8" combination square socket sizes for most common utility hardware
- Bright yellow socket for easy visibility
- Works on most common utility pole hardware, such as lag bolts, "C" clamps and suspension bolts
- Side ridges that provide a better grip (Cat. Nos. KT151T and KT152T)



Cat. No.	Description	Sizes		
		Square Bits	Hex Bits	Overall Length
KT151T	4-in-1 Lineman's Ratcheting Wrench	3/4", 13/16", 1", 1-1/8"	—	13" (33 cm)
KT152T	4-in-1 Lineman's Slim Ratcheting Wrench	3/4", 13/16", 1", 1-1/8"	—	13.25" (33.7 cm)
KT155HD	6-in-1 Lineman's Ratcheting Wrench, Heavy-Duty	3/4", 13/16", 1", 1-1/8"	9/16", 3/4"	12" (30.5 cm)
KT155T	6-in-1 Lineman's Ratcheting Wrench	3/4", 13/16", 1", 1-1/8"	9/16", 3/4"	9.375" (23.8 cm)

Flip Impact Socket Set, 7-Piece

- Flip Impact Socket Set includes ten sizes combined into five sockets plus two nested adapters
- Easy-to-use flip feature allows for quick changes and reduces number of tools
- Nested adapters for dual drive (1/4", 1/2") capability; patent pending
- 6-Point design is easier to position and work with square fasteners
- Great for hardware installation and removal
- Cross hole design to prevent unintentional separation of adapter and socket
- Engineered for use with impact drivers including Klein's 1/2-Inch Compact Impact Wrench (Cat. Nos. BAT20CW, BAT20CW1) and 1/4-Inch Compact Impact Driver (Cat. Nos. BAT20CD, BAT20CD1)
- Sockets are color coded to quickly identify size
- Includes case for storage



IMPACT RATED!



Cat. No.	Description	Socket Size
66070	Flip Impact Socket Set, 7-Piece	15/16" and 7/8", 3/4" and 13/16", 11/16" and 5/8", 9/16" and 1/2", 7/16" and 3/8"
66078	Flip Impact Socket Adapter, Large	1/2" to 1/2"
66079	Flip Impact Socket Adapter, Small	1/4" to 1/4"

6-Point Set

Cat. No.	Socket Sizes	6-Point Set
66073	15/16" and 7/8"	●
66074	3/4" and 13/16"	●
66075	11/16" and 5/8"	●
66076	9/16" and 1/2"	●
66077	7/16" and 3/8"	●

Impact Flip Sockets

- Patent-pending design with onboard storage
- Quickly and easily change blade between a screwdriver handle and an impact driver
- Multi-function 1/4" socket has both shallow (driver) and deep (bit holder) configurations for added versatility
- Powerful Rare-Earth magnet securely holds bits and hex head fasteners
- Detachable sockets allow for easy removal of metal shavings from magnet
- Features 1/4" Quick-Connect adapter for easy use with an impact driver



IMPACT RATED!

Cat. No.	Description	Hex Sizes Included
32900	7-in-1 Impact Flip Socket	1/4", 5/16", 11/32", 3/8", 7/16", 1/2"
32907	7-in-1 Impact Flip Socket Set - No Handle	1/4", 5/16"
32768	3-in-1 Impact Flip Socket Set	1/4", 5/16"

Impact Flip Sockets

- Easy-to-use flip feature allows for quick changes between Penta and Hex socket sizes
- Includes two of the most common socket sizes (13/16" Penta and 3/4" Hex) in one tool
- 5-Point, 13/16" Penta socket works with security bolts commonly used in underground distribution work
- 6-Point, 3/4" Hex socket is easier to position
- Deep well socket with 1/2" drive works great for hardware installation and removal
- 1/2 to 1/2" square adapter has a black manganese phosphate finish for rust resistance
- Includes a ball detent that helps prevent unintentional separation of adapter and socket
- Socket engineered for use with impact drivers including Klein's 1/2" Compact Impact Wrench (Cat. Nos. BAT20CW, BAT20CW1)



IMPACT RATED!

Cat. No.	Description	Socket Size
66080	Penta/Hex Flip Socket with Adapter	13/16" Penta (5 point), 3/4" Hex (6 point), 1/2" to 1/2" Adapter



NOTE: Read and follow safety instructions in power tool owner's manual.

Electrician's Hammers

- H80718 features an engineered claw pulling feature for NMB (Romex®) staple removal



Cat. No.	Type	Feature	Head Weight	Overall Length
H80816	Straight-Claw	Tether Hole for Hanging	16 oz (454 g)	12.8" (32.5 cm)
H80820	Straight-Claw	Tether Hole for Hanging	20 oz (567 g)	12.8" (32.5 cm)
H80718	Straight-Claw	NM-B Staple Pulling; Tether Hole for Hanging	18 oz (510 g)	14.8" (38 cm)
H80332	Ball-Peen	Tether Hole for Hanging	32 oz (907 g)	14.9" (38 cm)

Romex® is a registered trademark of Southwire Company.

Straight-Claw Hammers

- Straight-claw design for easy nail pulling in tight quarters
- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight



Cat. No.	Type	Head Weight	Overall Length
807-18	Straight-Claw	18 oz (510 g)	15" (38.1 cm)
808-16	Straight-Claw	16 oz (454 g)	13" (33 cm)

Lineman's Claw Milled Hammer

- Large head for driving in staples and lag bolts
- Milled face aids in driving staples into utility poles
- Claw end for removing nails, molding, and ground wire
- Lighter 26-oz. head compared to the traditional 32-oz. hammer



Cat. No.	Head Weight	Overall Length
832-26	26 oz (737 g)	14.84" (38 cm)

Lineman's Straight-Claw Hammer

- Heavy-duty, double-duty hammer drives lags and pulls large nails
- Straight-grain hickory handle, lacquered to withstand weather
- Special high-carbon steel head with solid, octagon-shaped driving end and thick, strong claw




Cat. No.	Head Weight	Overall Length
832-32	32 oz (907 g)	15" (38.1 cm)

Lineman's Double-Face Hammers

- Designed for pole-line work
- Rugged and well-balanced, with the weight to drive lag bolts
- Faces with 1-3/4" (4.4 cm) round-crown driving surface and beveled edges
- One milled face for driving staples used in pole-line work and common, unhardened nails (Cat. No. 809-36MF)
- Forged, tempered-steel head is only 3-3/4" (9.5 cm) long for use in tight areas



809-36
both sides



809-36MF
one side

Cat. No.	Feature	Head Weight	Overall Length
809-36	Double-Face	36 oz (1021 g)	14" (35.6 cm)
809-36MF	Milled-Face	36 oz (1021 g)	14" (35.6 cm)

Non-Sparking Hammers

- Brass-head hammers are non-sparking, non-marring
- Large sweep at base prevents loss of grip
- Head is securely epoxied to prevent detachment
- Fiberglass handle includes TPR overmold for extra comfort and shock absorption
- Built-in overstrike protector absorbs shock and vibration when overstrike occurs



Cat. No.	Head Weight	Overall Length
819-03	3.0 lb (1.4 kg)	15.75" (40 cm)
819-04	4.0 lb (1.8 kg)	16" (40.6 cm)

Dead Blow Hammers


- Durable, abrasion resistant non-marring hammer face
- Increased striking force with zero impact rebound
- Design isolates user from striking impact and reduces fatigue
- 40% more driving power than other dead blow hammers



Cat. No.	Head Weight	Overall Length
811-16	16 oz (454 g)	12.5" (31.8 cm)
811-32	32 oz (907 g)	18" (45.7 cm)

Brass Sledge Hammers

- Used in non-sparking environments or to avoid damage to struck objects
- Head forged from brass for softer, non-damaging blow
- Head is pinned to handle as well as epoxied to prevent head coming off
- Comfortable, thick rubber grip handle for increased protection from shock and vibration
- Handle includes both overstrike protection and large sweep at base to prevent loss of grip



Cat. No.	Head Weight	Overall Length
7HBRFRH07	7 lb (3.2 kg)	32" (81.3 cm)
7HBRFRH10	10 lb (4.5 kg)	36" (91.4 cm)
7HBRFRH04	4 lb (1.8 kg)	16" (40.6 cm)
7HBRFRH14	14 lb (6.4 kg)	36" (91.4 cm)

LEVELS & MEASURING



Billet Aluminum Torpedo Levels

- Patented magnet track keeps powerful Rare-Earth magnets in place
- Cat. No. 935RBLT features large, easy to read bright LED high-definition vials for any lighting condition, a 3-minute auto-shut-off to save batter life, and is water and impact resistant



Super Bright High-Definition LED Vials (Cat No. 935RBLT)



935RB



935RBLT

Cat. No.	Number of Vials	Type of Vials	Overall Length
935RBLT	3	0°, 90°, 45°	9" (22.9 cm)
935RB	4	0°, 90°, 45°, 30°	8" (20.3 cm)

Digital Angle Gauge and Level

- This Digital Angle Gauge and Level can measure or set angles, check relative angles, or can be used as a digital level
- High visibility reverse contrast display improves visibility in dimly lit work environments
- Strong magnetic base attaches to conduit, pipes, saw blades, vents, ducts, and other ferromagnetic surfaces
- V-Groove edges enable optimal alignment on conduit and pipes for bending and alignment
- 0° to 90° and 0° to 180° measurement ranges facilitate multiple and diverse applications
- 0° to 180° range is useful when accounting for kickback in pipe bending applications when bending to 90° or more
- Display auto-rotates when upside-down for easy viewing
- Water and dust resistant with rating of IP42
- Soft carrying case and 2 x AAA batteries included
- Optional Plumber's Kit (Cat. No. 69346) allows the level to be used with PVC and other non-magnetic pipes and conduit, up to 6" of outer diameter



935DAG



Cat. No.	Accuracy	Overall Height	Overall Width	Overall Length
935DAG	±0.1° from 0° to 1°, 89° to 91°, 179° to 180°; ±0.2° at All Other Angles	2.2" (5.6 cm)	1.2" (3 cm)	2.36" (6 cm)

Tape Measures

- Heavy-Duty nylon coating protects blade printing
- Super-sized back clip holds securely to wide belts and extends into pockets
- Printing with centimeters and inches (Cat. No. 9375)
- Cat. No. 9125 has one-sided printing



Double Hook End



Single Hook End



9225

Cat. No.	Tape Length	Hook	Magnetic	Overall Width	Overall Length
9125	25' (7.6 m)	Single	No	2.35" (6 cm)	3.43" (8.7 cm)
9216	16' (4.9 m)	Double	Yes	2.35" (6 cm)	3.07" (8 cm)
9225	25' (7.6 m)	Double	Yes	2.35" (6 cm)	3.43" (8.7 cm)
9230	30' (9.1 m)	Double	Yes	2.35" (6 cm)	3.8" (9.7 cm)

Metric and Imperial

9375	7.5 m (25')	Double	Yes	2.35" (6 cm)	3.43" (8.7 cm)
------	-------------	--------	-----	--------------	----------------

⚠WARNING:

- Protect hands when cleaning magnetic tip end. Use gloves or cloth.
- Avoid magnetic contact with sensitive electronic or computer equipment.
- To avoid personal injury and damage to this tool, do not allow the tape blade to retract into case.
- Do NOT open case. Spring motor is under tension, and opening case may cause injury.



Jab Saws

- Cuts drywall, wallboard, plywood and plastic and other construction materials
- Faster cutting blade with triple ground teeth and ability to cut in both directions (push and pull)
- Folding Jab Saw (Cat. No. 31737) is as sturdy as fixed blade jab saws, with a lockback mechanism to secure the blade open at 125° and fully open at 180°
- Hardened, carbon-steel blade for durability
- Hardened, beveled blade point for scoring and plunge cuts
- Comfort cushioned grip handle
- Flat-end grip for palming or punching through drywall

Cat. No.	Description	Blade Length	Overall Length
31737	Folding Jab Saw	5.2" (13.2 cm)	11.9" (30.3 cm)
725	Jab Saw	6" (15.2 cm)	12" (30.5 cm)

⚠WARNING: Blades are intended for cutting only, and should be handled and disposed of with care. Bending the blade can cause it to break, possibly resulting in bodily injury. Check local law on legality of selling, possessing, or carrying these knives.



725



31737



Folding Jab Saw blade securely locks at 125° and 180°

Folding Jab Saw shown closed, prevents punctures to tool bags

Cable Skinning Utility Knife with Replaceable Blade

- Heavy-duty sheepfoot blade is replaceable to eliminate the need for sharpening
- Blade locks securely by a captive lock screw, making it as solid as a fixed-blade knife
- Thumb stud for easy opening
- Handle has rubber exterior for increased grip
- A lock-back design securely locks the blade in the open position
- Pocket clip for easy storage and convenient access

Knife shown folding into handle




44218

Cat. No.	Special Features	Blade Length	Blade Material	Handle Color	Overall Length
44218	Replaceable Blade Knife	2.5" (6.4 cm)	440A Stainless Steel	Orange/Black	7.797" (19.8 cm)



HAWKBILL BLADE 44219



COPING BLADE 44138

Replacement Blades

Cat. No.	Blade Length	Blade Type	Package Quantity
44219	2.5" (6.4 cm)	Hawkbill	3
44138	2.0" (4.9 cm)	Coping	3

Reciprocating Saw Blades

- Bi-metal blades offer different cutting applications of steel and wood
- Bi-metal construction for long cutting life
- Heat and wear resistant
- Shock resistant teeth resist strippage
- 1/2" universal shank to fit all popular reciprocating saw tools
- Made in USA



31716



31728

Cat. No.	Application	Teeth Per Inch	Blade Length	Blade Width	Blade Thickness	Package Quantity
31716	Wood with Nails	6	6" (15.2 cm)	0.75" (1.9 cm)	0.050" (1.27 mm)	5
31751	Wood, Wood with Nails	6	9" (22.9 cm)	0.75" (1.9 cm)	0.050" (1.27 mm)	5
31761	Wood with Nails	6	12" (30.5 cm)	0.75" (1.9 cm)	0.050" (1.27 mm)	5
31731	Wood with Nails, Heavy Gauge Metals	10/14	6" (15.2 cm)	0.75" (1.9 cm)	0.050" (1.27 mm)	5
31741	Wood with Nails, Heavy Gauge Metals	10/14	8" (20.3 cm)	0.75" (1.9 cm)	0.050" (1.27 mm)	5
31727	Heavy Gauge Metals	14	6" (15.2 cm)	0.75" (1.9 cm)	0.035" (0.89 mm)	5
31755	Heavy Gauge Metals	14	9" (22.9 cm)	1" (2.5 cm)	0.042" (1.07 mm)	5
31728	Heavy Gauge Metals	18	6" (15.2 cm)	0.75" (1.9 cm)	0.035" (0.89 mm)	5
31739	Heavy Gauge Metals	18	8" (20.3 cm)	0.75" (1.9 cm)	0.035" (0.89 mm)	5
31734	18 Gauge and Under	24	6" (15.2 cm)	0.75" (1.9 cm)	0.035" (0.89 mm)	5

NOTE: Read and follow safety instructions in power tool owner's manual.

⚠WARNING: Blades are intended for cutting only, and should be handled and disposed of with care. Bending the blade can cause it to break, possibly resulting in bodily injury. Check local laws on legality of selling or possessing these knives.

DRILL BITS



Double-Fluted High-Speed Step Drill Bits

- Two flutes cut faster and keep bit cooler
- Easy-to-read silver step rings save time when drilling common holes
- Fast-starting, non-walking drill tip
- Thick, extra-long 3/8" hex shank provides a firm, positive grip in the drill and won't spin out



High-visibility silver step rings!

IMPACT RATED!

Cat. No.	Quick Reference	Number of Holes	Increment	Size
KTSB01	#1	13	1/32" (0.8 mm)	1/8" to 1/2" (3.2 to 12.7 mm)
KTSB03	#3	9	1/16" (1.6 mm)	1/4" to 3/4" (6.4 to 19.1 mm)
KTSB11	#11	2	—	7/8" to 1-1/8" (22.2 to 28.6 mm)
KTSB14	#14	12	1/16" (1.6 mm)	3/16" to 7/8" (4.8 to 22.2 mm)
KTSB15	#15	3	—	7/8" to 1-3/8" (22.2 to 34.9 mm)




VACO® Step Drill Bits

- Step Drill Bit has 2 spiral flutes to remove chips and help pull the bit through material for faster cutting
- Titanium nitride coating dissipates heat for longer bit life
- 1/4" hex shank for firm, positive grip in impact driver and standard drill
- Split point tip quickly starts hole cuts and prevents drifting when pressure is added
- Laser-etched hole size markings for quick size identification
- For use on steel (up to 16 gauge), wood, plastic, and aluminum

IMPACT RATED!

Cat. No.	Description	Holes	Increment	Hole Size Ranges
25960	VACO Step Drill Bit	3	—	7/8" to 1-3/8" (22.2 to 34.9 mm)
25961	VACO Step Drill Bit	2	—	7/8" to 1-1/8" (22.2 to 28.6 mm)
25962	VACO Step Drill Bit	12	1/16" (1.6 mm)	3/16" to 7/8" (4.8 to 22.2 mm)
25963	VACO Step Drill Bit	9	1/16" (1.6 mm)	1/4" to 3/4" (6.4 to 19.1 mm)
25964	VACO Step Drill Bit	13	1/32" (0.8 mm)	1/8" to 1/2" (3.2 to 12.7 mm)
Kits				
25950	VACO 4-Piece All Purpose Step Drill Bit Kit	Includes Cat. Nos. 25960, 25962, 25963, 25964, 1 oz. Bottle Cutting Oil, and Hard Carry Case		
25951	VACO 3-Piece Electrician's Step Drill Bit Kit	Includes Cat. Nos. 25960, 25961, 25962, 1 oz. Bottle Cutting Oil, and Hard Carry Case		

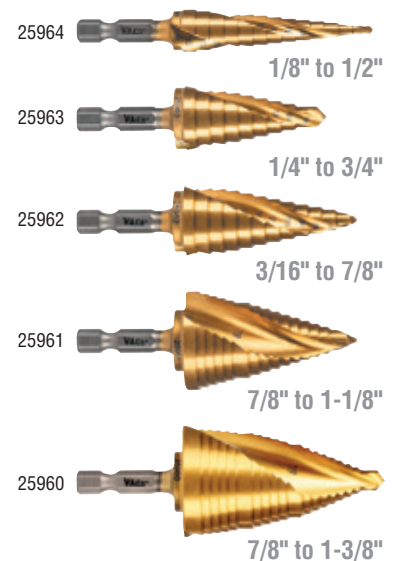

Ship-Auger Bits with Screw Point

- Drills through nails, wood, vinyl, plastics and heavy timber
- Special bit steel with machine-ground flutes and polished edges for smooth, wobble-free boring
- Full length is heat-treated and tempered
- Deep, open-throat design clears chips for faster, cleaner cuts
- 7/16" hex shafts fit 1/2" and larger three-jaw chucks
- Head and twist are ground to correct clearance for easy removal from hole
- For heavy construction and repair work in mines, on docks and bridges, as well as electrical work



Cat. No.	Bit Diameter	Twist Length	Overall Length
53402	3/4" (1.9 cm)	4" (10.2 cm)	6" (15.2 cm)
53404	7/8" (2.2 cm)	4" (10.2 cm)	6" (15.2 cm)
53406	1" (2.5 cm)	4" (10.2 cm)	6" (15.2 cm)
53408	1-1/8" (2.9 cm)	4" (10.2 cm)	6" (15.2 cm)



NOTE: Read and follow safety instructions in power tool owner's manual.

TRADESMAN PRO™

Ironworker and Welder Backpack

- Exterior 1680d ballistic weave and leatherette materials meet NFPA701 standards for flame resistance
- Carry a welding helmet and hard hat at the same time
- Custom straps to hold two 18" spud wrenches
- Pocket for a hammer up to 6 lb (2.7 kg) with a 16" (40.6 cm) handle
- Exterior water bottle pocket
- Room to fit additional tools, gear and safety equipment inside
- Front welding helmet pocket is removable and adjustable




Cat. No.	Description	Number of Pockets	Overall Length	Overall Width	Overall Height
55665	Tradesman Pro™ Ironworker and Welder Backpack	27	17.5" (44.5 cm)	16" (40.6 cm)	24.5" (62.2 cm)
55663	Welding Helmet Pocket (Replacement Part)	1	7.5" (19 cm)	10.5" (25.4 cm)	13.5" (34.3 cm)
55664	Hard Hat Elastic Bands (Replacement Part)	—	7" (17.8 cm)	4" (10.2 cm)	0.5" (1.3 cm)

TRADESMAN PRO™

Rolling Tool Backpack

- Converts from a backpack to a rolling tool bag by extending the telescoping handle and stowing the shoulder straps behind the back padding
- Telescoping handle positioned on sides of bag for stability when maneuvering around corners
- Water-resistant 1680d ballistic weave material
- Attach Klein Tools headlamps (not included) to headlamp bracket to illuminate bag's interior or work area
- Hard molded front pocket helps protect phones and safety glasses
- 3" heavy-duty wheels transport tools over various terrain

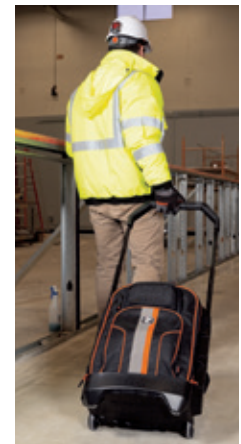

Cat. No.	Description	Number of Pockets	Overall Length	Overall Width	Overall Height
55604	Tradesman Pro™ Rolling Tool Backpack	28	17.5" (44.5 cm)	10.25" (26 cm)	25.5" (64.7 cm)

PowerBox 1

- Powerful magnets for attaching to metal job boxes, workbenches, and more
- Integrated LED lights brightens up any job box to locate stored tools, batteries, and cords
- Four 120V AC outlets, two USB-A ports and one 45W PD capable USB-C port for fast charging of cell phones, laptops, and other compatible devices
- Built-in surge protection with LED indicator to protect your equipment from electrical spikes
- Durable, 5' power cord for flexible mounting across job box or elsewhere



MAGNETIC MOUNTING
LED LIGHTING
45W USB-C
POWER DELIVERY



Cat. No.	Mount	Overall Length	Overall Width	Overall Height
29601	Magnetic or Hang holes	5.8" (14.7 cm)	1.8" (4.6 cm)	4.7" (11.9 cm)

Rechargeable Clamping Fan

- Personal indoor/outdoor fan has multiple mounting options perfect for the job site
- Arm base rotates and cage spins 360° to aim airflow in any direction
- Two powerful magnets, and a hang hole are incorporated into the base for mounting
- Base forms a strong clamp for attaching to studs/conduit or place on flat surface
- Features two long-lasting fan modes: Low for 12 hours; High for 5 hours (Cat No. PJSFM2)



Cat. No.	Description	Mounting Type	Color	Overall Length	Overall Height	Overall Width	Battery Life
PJSFM2	Rechargeable Clamping Fan	Magnets, Clamp, Hang Hole, Sit on Base	Orange, Dark Gray	10" (25 cm)	13" (33 cm)	5" (13 cm)	High 5 hrs, Low 12 hrs
PJSFM1	Rechargeable Personal Jobsite Fan	Magnets, Clamp, Hang Hole, Sit on Base	Orange, Dark Gray	9" (22.9 cm)	10.52" (26.7 cm)	4.15" (10.5 cm)	High 5 hrs, Low 9 hrs



TEST & MEASUREMENT

Multimeters

TOUGH METER

Slim Profile



	MM720	MM450	MM420	MM325
<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) Reverse contrast display AC/DC voltage AC/DC current Resistance Continuity Temperature Capacitance Frequency Low impedance functionality LCD Lead Alert function 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) Reverse contrast display AC/DC voltage AC/DC current Resistance Continuity Temperature Capacitance Frequency Duty Cycle Tests Diodes Features Lead Alert LED's 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) Backlight AC/DC voltage AC/DC current Resistance Continuity Temperature Capacitance Frequency Features Lead Alert LED's 	<ul style="list-style-type: none"> Manual-ranging Backlight AC/DC voltage DC current Resistance Continuity Battery Test Lead Alert LED's 	

	MM720	MM450	MM420	MM325
Included	<ul style="list-style-type: none"> Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple (2) AAA Batteries Carrying Case 	<ul style="list-style-type: none"> Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple (2) AAA Batteries Carrying Case 	<ul style="list-style-type: none"> Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple (2) AAA Batteries 	<ul style="list-style-type: none"> Instruction Manual Test Leads with CATIII/CAT IV safety caps (2) AAA Batteries
Standard	CAT IV 600V CAT III 1000V	CAT III 600V	CAT III 600V	CAT III 600V
Overall Length	6.94" (17.6 cm)	6.49" (16.5 cm)	6.00" (15.2 cm)	6.41" (16.2 cm)
Overall Width	3.37" (8.5 cm)	3.14" (8.0 cm)	3.16" (8 cm)	3.13" (7.9 cm)
Overall Depth	1.88" (4.7 cm)	1.09" (2.8 cm)	1.78" (4.5 cm)	1.83" (4.6 cm)
Weight	12.17 oz (345 g)	9.1 oz (258 g)	8.15 oz (231 g)	8.82 oz (250 g)

FEATURES	MM720	MM450	MM420	MM325
Drop Protection	6.6' (2 m)	6.6' (2 m)	6.6' (2 m)	6.6' (2 m)
Ingress Protection	IP42	-	-	-
Safety	CAT IV 600V CAT III 1000V	CAT III 600V	CAT III 600V	CAT III 600V
AC Voltage (Volts)	1000V	600V	600V	600V
DC Voltage (Volts)	1000V	600V	600V	600V
AC Current (Amps)	10A	10A	10A	-
DC Current (Amps)	10A	10A	10A	10A
Ohms (Resistance)	60MΩ	50MΩ	50MΩ	2MΩ
DC Millivolts	●	●	●	●
AC Milliamps	●	●	●	-
DC Milliamps	●	●	●	●
AC Microamps	●	●	●	-
DC Microamps	●	●	●	●
TRMS	●	●	●	-
Audible Continuity	●	●	●	●
Backlight	Reverse-Contrast Optical Sensor	Reverse-Contrast Optical Sensor	●	●
°F °C Temperature	-40° - 1832°F (-40° - 1000°C)	-40° - 1832°F (-40° - 1000°C)	-40° - 1832°F (-40° - 1000°C)	-
LOW Z	●	-	-	-
AUTO	●	●	●	-
RANGE	●	●	●	-
HOLD	●	●	●	●
Diode Test	●	●	●	●
Capacitance Test	6000 µF	400 µF	400 µF	-
Hz % Frequency / Duty Cycle	1Hz - 500 KHz	1Hz - 50 KHz	1Hz - 50 KHz	-
MAX/MIN	●	●	●	-
LEAD	On LCD	Green LED's	Green LED's	Green LED's
Magnetic Mount	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory
APO	●	●	●	●
Battery Test	-	-	-	●
LCD Display Count	6000	4000	4000	2000



CLAMP METERS



	CL900	CL800	CL700	CL600	CL445	CL390	CL320	CL220	CL120
	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 2000A AC/DC current AC/DC voltage Resistance Continuity Frequency Duty cycle Capacitance Tests diodes Low Impedance (LoZ) mode Inrush Current Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 600A AC/DC current AC/DC voltage Resistance Continuity Frequency Duty cycle Capacitance Tests diodes Temperature Low Impedance (LoZ) mode Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 600A AC current AC/DC voltage Resistance Continuity Frequency Duty cycle Capacitance Tests diodes Temperature Low Impedance (LoZ) mode Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 600A AC current AC/DC voltage Resistance Continuity Tests diodes Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 600A AC current AC/DC voltage DC Microamps DC Millivolts Resistance Continuity Frequency Duty cycle Capacitance Tests diodes Inrush Current Temperature Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 400A AC/DC current AC/DC voltage AC/DC Millivolts Resistance Continuity Frequency Duty cycle Capacitance Tests diodes Temperature Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 400A AC current AC/DC voltage DC Microamps Resistance Continuity Frequency Duty cycle Capacitance Tests diodes Temperature Non-Contact Voltage Testing 	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 400A AC current AC/DC voltage AC/DC Millivolts Resistance Continuity Temperature Non-Contact Voltage Testing 	
Included	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps 2 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple with adapter 2 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple with adapter 2 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps 2 x AAA Batteries 	<ul style="list-style-type: none"> Right-angle Input Test Leads Push-on Alligator Clips K-Type Thermocouple Storage Pouch Instruction Manual 3 AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple 3 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple 3 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps Thermocouple 3 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CATIII/CAT IV safety caps 3 x AAA Batteries
Jaw Size	2.00" (5 cm)	1.38" (3.5 cm)	1.38" (3.5 cm)	1.38" (3.5 cm)	1.25" (3.2 cm)	1.6" (4.1 cm)	1.6" (4.1 cm)	1.6" (4.1 cm)	1.6" (4.1 cm)
Overall Length	10.39" (26.4 cm)	9.09" (23.1 cm)	9.09" (23.1 cm)	9.09" (23.1 cm)	9.24" (23.5 cm)	8.45" (21.5 cm)	8.45" (21.5 cm)	8.45" (21.5 cm)	8.45" (21.5 cm)
Overall Width	3.90" (9.9 cm)	3.81" (9.7 cm)	3.81" (9.7 cm)	3.81" (9.7 cm)	3.77" (9.6 cm)	3.5" (8.9 cm)	3.5" (8.9 cm)	3.5" (8.9 cm)	3.5" (8.9 cm)
Overall Height	1.70" (4.3 cm)	1.55" (3.9 cm)	1.55" (3.9 cm)	1.55" (3.9 cm)	1.59" (4.0 cm)	1.5" (3.8 cm)	1.5" (3.8 cm)	1.5" (3.8 cm)	1.5" (3.8 cm)
Weight	17.6 oz (499 g)	12.5 oz (354 g)	11.8 oz (335 g)	11.8 oz (335 g)	12.5 oz (355 g)	11 oz (314 g)	11 oz (314 g)	11 oz (314 g)	11 oz (314 g)



CLAMP METERS



FEATURES	CL900	CL800	CL700	CL600	CL445	CL390	CL320	CL220	CL120
Drop Protection	6.6' (2 m)	6.6' (2 m)	6.6' (2 m)	6.6' (2 m)	6.6 ft. (2 m)	6.6' (2 m)	6.6' (2 m)	6.6' (2 m)	6.6' (2 m)
Ingress Protection	IP40	IP40	IP40	IP40	-	-	-	-	-
Safety	CAT IV 600V CAT III 1000V	CAT IV 600V CAT III 1000V	CAT IV 600V CAT III 1000V	CAT IV 600V CAT III 1000V	CAT IV 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
AC Voltage (Volts)	1000V	1000V	1000V	1000V	750V	600V	600V	600V	600V
DC Voltage (Volts)	1000V	1000V	1000V	1000V	600V	600V	600V	600V	600V
AC + DC Voltage	-	-	-	-	●	-	-	-	-
AC Current (Amps)	2000A	600A	600A	600A	600A	400A	400A	400A	400A
DC Current (Amps)	2000A	600A	-	-	-	400A	-	-	-
Ohms (Resistance)	60MΩ	60MΩ	60MΩ	60MΩ	60MΩ	40MΩ	40MΩ	20MΩ	20MΩ
AC Millivolts	-	-	-	-	●	●	-	●	●
DC Millivolts	●	●	●	●	●	●	●	●	●
DC Microamps	-	-	-	-	●	●	●	-	-
True RMS	●	●	●	●	●	●	●	●	-
Audible Continuity	●	●	●	●	●	●	●	●	●
Backlight	●	●	●	●	●	Reverse Contrast Display		●	●
Temperature	-	-14° - 1000°F (-26° - 538°C)	-14° - 1000°F (-26° - 538°C)	-	-148° - 1832°F (-100° - 1000°C)	-40° - 1832°F (-40° - 1000°C)	-40° - 1832°F (-40° - 1000°C)	-40° - 1832°F (-40° - 1000°C)	-
Low Impedance	●	●	●	-	-	-	-	-	-
Low-Pass Filter	-	-	-	-	-	-	-	-	-
Inrush Current	2000A	-	-	-	600A	-	-	-	-
Non-Contact Voltage Testing	●	●	●	●	●	●	●	●	●
Auto Ranging	●	●	●	●	●	●	●	●	●
Range Hold	●	●	●	●	●	●	●	●	●
Data Hold	●	●	●	●	●	●	●	●	●
Diode Test	●	●	●	●	●	●	●	-	-
Capacitance Test	6000 μF	6000 μF	6000 μF	-	6000 μF	4000 μF	4000 μF	-	-
Frequency / Duty Cycle	1Hz - 500kHz	1Hz - 500kHz	1Hz - 500kHz	-	10Hz - 60kHz	10Hz - 60kHz	10Hz - 1MHz	-	-
Max / Min	●	●	●	●	●	●	●	MAX only	MAX only
Relative Mode	-	-	-	-	-	●	-	-	-
Magnetic Mount	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory	Available As Accessory
Worklight	-	●	-	-	●	●	-	-	-
Auto-Power Off	●	●	●	●	●	●	●	●	●
LCD Display Count	6000	6000	6000	6000	6000	4000	4000	2000	2000



CLAMP METERS



	CL360	CL150
	<ul style="list-style-type: none"> Auto-ranging True root mean square (TRMS) 200A AC current AC/DC voltage Resistance Continuity Non-Contact Voltage Testing 	<ul style="list-style-type: none"> True root mean square (TRMS) 3000A AC current Data Hold Max/Min
Included	<ul style="list-style-type: none"> Carrying Case Instruction Manual Test Leads with CAT III/CAT IV safety caps 2 x AAA Batteries 	<ul style="list-style-type: none"> Carrying Case Instruction Manual 2 x AAA Batteries
Standards	Jaw and Housing: CAT IV 600V/CAT III 1000V Electrical: CAT III 600V/CAT II 1000V	CAT IV 600V, CAT III 1000V
Overall Length	8.39" (21.3 cm)	10.50" (26.7 cm)
Overall Width	2.12" (5.4 cm)	4.12" (10.5 cm)
Overall Height	1.38" (3.5 cm)	1.06" (2.7 cm)
Weight	6.40 oz (180.0g)	5.90 oz (167.0 g)

FEATURES	CL360	CL150
Drop Protection	9.8' (3 m)	6.6' (2 m)
Ingress Protection	IP40	—
Safety	Jaw & Housing CAT IV 600V CAT III 1000V Electrical & Protection Circuit CAT III 600V CAT II 1000V	CAT IV 600V CAT III 1000V
AC Voltage (Volts)	600V	—
DC Voltage (Volts)	1000V	—
AC Current (Amps)	200A	3000A
Ohms (Resistance)	60MΩ	—
True RMS	●	●
Audible Continuity	●	—
Backlight	●	●
Non-Contact Voltage Testing	●	—
Auto Ranging	●	—
Range Hold	—	●
Data Hold	●	●
Max / Min	—	●
Auto-Power Off	●	●
LCD Display Count	6000	3000

Electrical Test Kits

Best-Sellers in Convenient Value Kits



Cat. No.	Description	Included
CL120KIT	Clamp Meter Electrical Test Kit	CL120 Digital Clamp Meter with Test Leads; 69409 Line Splitter 10x; RT210 GFCI Receptacle Tester; Carrying Pouch; Instructions; and All Required Batteries
CL120VP	Clamp Meter Electrical Test Kit	CL120 Digital Clamp Meter with Test Leads; NCVT-3P Dual Range Non-Contact Voltage Tester with Flashlight; ET40 Electronic AC/DC Voltage Tester; RT210 GFCI Receptacle Tester; Carrying Case; Instructions; and All Required Batteries
CL320KIT	HVAC Electrical Test Kit	CL320 Digital Clamp Meter with Test Leads and Thermocouple; IR07 Dual IR and Probe Thermometer; NCVT-3P Dual Range Non-Contact Voltage Tester with Flashlight; Carrying Pouch; Instructions; and All Required Batteries





Receptacle Tester

- Light sequence indicates correct/incorrect wiring
- Conforms to UL Std 1436, Certified to CSA Std C22.2 #160
- Operating temp: 32° to 140°F (0° to 40°C)
- Built to withstand a 6.6' (2 m) drop
- Nominal Voltage: 110/125V AC at 50/60Hz in 3-wire outlet
- Designed to detect the most common wiring problems in standard receptacles
- Cat. No. RT210 works on GFCI outlets and confirms operation of the ground fault



RT210

Cat. No.	GFCI	Overall Length	Overall Height	Overall Width
RT210	Yes	1.62" (4.1 cm)	2.88" (7.3 cm)	1.88" (4.8 cm)

Non-Contact Voltage Tester

- CAT IV safety rating
- Auto power-off
- Convenient pocket clip
- Does not detect DC voltage
- NCVT-1XT detects 70 - 1000V AC in cables, cords, circuit breakers, lighting fixtures, switches, non tamper-resistant outlets and wires. Dustproof and waterproof with durable 9.8' (3 m) drop protection. Easy access to battery compartment.



NCVT-1XT



Features	NCVT-1XT	Features	NCVT-1XT
Drop Protection	9.8' (3 m)	Laser	—
Ingress Protection	IP67	Flashlight	—
Safety and Standards	CAT IV 1000V	Distance Measuring	—
Voltage	70 - 1000V AC	Backlight	—
Frequency Range	50 - 500 Hz	LCD Display	—
Audible and Visual Alarms	●	Batteries	2 x AAA
Auto-Power Off	●	Overall Length	5.34" (13.6 cm)
Temperature	—	Overall Height	0.97" (2.5 cm)
		Overall Width	1.08" (2.8 cm)

Voltage Testing Kit

Best-Sellers in Convenient Value Kits

- Voltage Tester provides non-contact detection of 70 to 1000V AC in cables, cords, circuit breakers, lighting fixtures, switches, non tamper-resistant outlets and wires
- Durable tester is dustproof and waterproof with an IP67 rating and 9.8' (3 m) drop protection
- CAT IV 1000V safety rating, low battery indicator, and easy access to battery compartment
- GFCI Tester detects the most common wiring problems in standard and GFCI receptacles: open ground, reverse polarity, open hot, open neutral, hot/ground reversed
- CAT II 300V safety rating, works on GFCI outlets, and confirms operation of the ground fault protective device
- NCV Tester is not recommended for testing tamper-resistant outlets; use Cat. Nos. NCVT-2P or NCVT-3P in low voltage mode



NCVT1XTKIT

Cat. No.	Description	Included
NCVT1XTKIT	Non-Contact Voltage and GFCI Receptacle Premium Test Kit	NCVT1XT Non-Contact Voltage Tester; RT210 GFCI Outlet Tester; Instructions; and All Required Batteries

Thermal Imagers for Mobile Devices

- Thermal Imager for iOS and Android® Devices has 10,800 pixels to deliver excellent resolution for troubleshooting hot and cold spots
- Thermal Imager for iOS fits phone cases up to 1/16" (0.15 cm); phone cases thicker than 1/16" (0.15 cm) may require removal of case for secure connection
- Easily capture, store and share thermal images and video, including time-lapse video
- Features touch screen temperature, high/low temperatures, and differential temperature readout
- View temperature ranges from -4° to 752° F (-20° to 400° C) in three color palettes; ironbow, rainbow, or grayscale
- Includes high/low temperature alarms to monitor systems
- Compatible with iOS devices 11 and higher (Cat. No. TI222)
- Compatible with most Android® devices versions 6.0 or higher with USB-C or Micro-USB connectors (Cat. No. TI220)
- Klein Tools Thermal Imager App and Thermal Imager Android® App is available for free in the App Store and Google Play™ store
- Durable 6.6' (2 m) drop test protection



Easily capture, store, and share thermal images and video using the Klein Tools Thermal Imager App. Available for free on Google Play™ Store or App Store®.



Cat. No.	UPC	Description	Compatibility	Mobile App
TI220	69348-9	Thermal Imager for Android® Devices	Android® 6.0 or higher	Google Play™ Store
TI222	69361-8	Thermal Imager for iOS Devices	iOS 11 or higher with Lightning connectors	App Store®

Android® a is a registered trademark of Google LLC. Google Play™ store is a trademark of Google LLC. App Store®, iPhone, and Lightning are registered trademarks of Apple Inc., registered in the U.S. and other countries. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used by Apple, Inc. under license.

*Cell phone not included



Rechargeable Thermal Imager

- Thermal Imager has over 10,000 pixels to troubleshoot hot and cold spots
- Adjustable emissivity from 0.10 to 0.99
- Store and share images with optional microSD® Card
- User selectable high and low temperature alarms from -4° to 752° Fahrenheit (-20° to 400° Celsius)
- Select color palettes to best capture the event
- Rechargeable lithium-ion battery
- Includes thermal imager, micro-USB charging cable, carrying case, and instructions



Cat. No.	Display	Display Resolution	Temperature Range	Batteries
TI250	2.4" (6.1 cm) TFT LCD	10,800 Pixels	-4° to 752°F (-20° to 400°C)	Lithium-Ion

*microSD® is a registered trademark of SD-3C, LLC.



WIRE PULLING



Conduit Measuring Pull Tapes

- Pull Tape is a woven, flat polyester strapping that disperses pull load and minimizes stretching when pulling
- Tape is marked with easy-to-read, descending 1' increments to measure conduit runs and determine the amount of tape left to pay out
- Pre-lubricated to reduce friction
- Hole in bucket lid for controlled, tangle-free dispensing, bucket also provides easy storage and transport

Cat. No.	Container	Tensile Strength	Overall Length
50122	Orange Bucket with Lid and Handle	1250 lb (567 kg)	2000' (609.6 m)
50131	Orange Bucket with Lid and Handle	1800 lb (816 kg)	1300' (396 m)
50141	Orange Bucket with Lid and Handle	2500 lb (1134 kg)	1000' (305 m)
50142	Rod-Reinforced Reel	2500 lb (1134 kg)	3000' (914 m)



50141



50142

Glow Fish Tapes

- Unique Glow-in-the-Dark fiberglass tape and nylon tip
- Fully removable from case for more versatile application such as pass-through wire feeding; alignment mark on case makes for easy re-installation into housing
- Anchoring end utilizes stainless steel connector that is compatible with Klein Fish Rod attachments (see Cat. No. 56511)
- Narrow, eyelet tip for easy feeding through crowded spaces
- Patent pending

Cat. No.	Tape Size	Diameter
50550	20' x 0.153" (6.1 m x 0.39 cm)	7.5" (19.1 cm)
50660	40' x 0.153" (12 m x 0.39 cm)	9" (23 cm)



50660



50550



VOICE DATA VIDEO (VDV)



Scout™ Pro 3 Tester Kits

- Test voice (RJ11/12), data (RJ45) and video (coax F-connector) cables
- Measure cable length (up to 2,000')
- Backlit LCD screen displays cable length, wiremap, cable ID and test results
- Detect, identify and test Power over Ethernet (PoE) (VDV501-852 and VDV501-853 kits only)
- Test for Open, Short, Miswire or Split-Pair faults
- Hub Blink mode to identify port location on a hub or a switch
- Includes voltage warning, shield detection, auto power-off and low battery indicator
- Remote options include up to 12 Test + Map™ remotes and up to 18 locator remotes
- All kits include a Self-Storing Test + Map™ Remote
- These models replace the Scout™ Pro 2 series of tester kits



	Cat. No.	VDV501-851 Starter Kit	VDV501-852 Locator Remote Kit
Included			
Scout™ Pro 3 Tester		●	●
Self-Storing Remote (#1)		●	●
Test + Map™ Remotes		–	–
RJ45 Locator Remotes		5	18
F-Coax Locator Remotes		5	18
Coax F Adapter (female-to-female)		1	2
Coax Barrel Adapters (male-to-female)		–	–
RJ45 Jumper Cables (6")		–	2
RJ11 Jumper Cables (6")		–	2
RJ12 Jumper Cables (6")		–	2
9V Alkaline Battery		●	●
Carrying Case		–	● VDV770-126





SCOUT™ PRO 3 FEATURES		VDV501-851 Starter Kit	VDV501-852 Locator Remote Kit
Backlit LCD		●	●
Measures Cable Length	 2000 ft. (610 m)	●	●
Tests RJ45 8-wire cables		●	●
Tests RJ11 4-wire Cables / RJ12 6-wire cables		●	●
Tests F-connector terminated coaxial cables		●	●
Tests TIA-568A/B & Crossover	Pass	●	●
Wiremap Display on LCD		●	●
Power over Ethernet (PoE) Testing - displays voltage and wiring (A/B)	PoE	—	●
Detects Open Fault		●	●
Detects Short Fault		●	●
Detects Miswires		●	●
Detects Split-Pairs		●	●
Cable Identification Remotes <i>Supports up to 19 (sold separately)</i>	ID	5 included	18 included
Self-Storing Test + Map™ Remote (#1)		●	●
Test + Map™ Remotes <i>Supports up to 12 (sold separately)</i>		sold separately	sold separately
Multiple Style Tone Generator*		●	●
Hub Blink		●	●
Auto Power Off	APO	●	●
Low Battery Indicator		●	●
Voltage Warning		●	●
Shield Detection		●	●
Battery Type (included)	9V alkaline	●	●

Replacement parts



VDV512-056



VDV526-055



VDV726-125



VDV770-125



VDV770-126



VDV770-127

*Requires an analog tone tracing probe (sold separately).

Cat. No.	Description
VDV770-125	Replacement Case for Scout™ Pro 3 Test + Map™ Remote Kit (VDV501-853), Upgrade Kit (VDV770-850)
VDV770-126	Replacement Case for Scout™ Pro 3 Tester Locator Remote Kit (VDV501-852)
VDV770-127	Replacement Zipper Bag for Test + Map™ Remote Expansion Kit (VDV770-851)
VDV512-056	CoaxMap™ Kit (include 19 coax locator remotes)
VDV526-055	LANMap™ Kit (include 19 RJ45 locator remotes)
VDV726-125	Universal RJ11/RJ12 Jumper Cable

Tone & Probe Test and Trace Kit

- Easy-to-use tone generator traces wire when used with included probe
- Responsive probe with durable, non-metallic, conductive tip
- Toner and probe together perform pin-to-pin wire map test
- Alligator clips for use on unterminated wires
- RJ11 plug easily connects to RJ11/RJ12 voice/telephone jacks or RJ45 data jacks
- Worklight on probe tip for use in dark spaces
- Headphone jack for noisy environments (headphones not included)

Cat. No.	Batteries	Included
VDV500-705	4 x AAA	RJ45 Cable, RJ12 cable + Alligator Clips, (4) AAA Batteries

Replacement Parts	
Cat. No.	Description
VDV770-855	Replacement Test Cables



LAN Scout™ Jr. 2 Cable Tester

- Cable tester for data (RJ45) terminated cables and patch cords
- Large backlit LCD for low lit areas displays pin to pin wiremap results
- Test for Open, Short, Miswire or Split-Pair faults, Cross-over and Shielded
- Intuitive user interface features three buttons with simple, easy-to-identify test responses
- Tone on single wire, wire pair or all 8 conductor wires



VDV526-200



Cat. No.	Description	Remote	Batteries	Display	Included
VDV526-200	LAN Scout™ Jr. 2 Tester	1	2x AAA	LCD	Tester, Remote, 2x AAA batteries
VDV999-200	Replacement Remote for LAN Scout™ Jr. 2 Tester				

LAN Explorer™ Data Cable Tester

- Single button testing of RJ11, RJ12 and RJ45 terminated voice and data cables
- Tests CAT3, CAT5e and CAT6/6A cables
- Fast LED responses indicate cable status (Pass, Miswire, Open-Fault, Short-Fault, and Shield)
- Test remote stores securely in tester body
- Compact tester easily fits in your pocket
- Auto Power-off feature to conserve battery life (9V battery included)
- Low battery indicator



VDV526-100

REMOTE REPLACEMENT VDV999-150



Cat. No.	Cable Type	Connector Type	Remote	Batteries	Display	Included
VDV526-100	CAT3, CAT5e, CAT6/6A	RJ11, RJ12, RJ45	1	1 x 9V	LED	Tester, Remote, 9V Battery

TDR Cable Length Meter

- Cable length meter measures length of electrical, data, two-wire and Romex® cables up to 3000' (914 m)
- TDR technology measures Distance-to-Fault, Open or Short, on terminated or unterminated cable
- Programmed with Velocity of Propagation (VoP) values for Coax, Data, Romex® and other multiwire cables for accurate length measurement within +/- (2° plus 3'/0.9 m) accuracy
- Stores custom cable VoP values for consistently accurate results and time savings
- Simple interface with full color, interactive LCD
- Tones unenergized, open-ended wires for wire tracing (requires Analog Probe (Cat. No. VDV500-123, sold separately))
- Coax-BNC or high-quality alligator clips for quick, easy connection to test most cable types
- RJ45 jack for accurate length measurement of terminated data cables
- Measurements can be switched between and metric and imperial units



501-915



770-910



Cat. No.	Description	Cable Types	Connector/Adapter Types	Display	Includes
501-915	TDR Cable Length Meter	Coaxial, Data, Electrical	Alligator clips, Female Coax-F, Male Coax-F, RJ45, BNC	Backlit LCD	Padded carrying case; leads
770-910	Replacement Lead Kit	—	—	—	One pair of 5 test leads

Romex® is a registered trademark of Southwire Company.

Coax Explorer™ 2 Testers


- Test coaxial cable and map up to 4 locations
- Simple push button operation
- Easy to read LED panel indicates PASS, OPEN or SHORT conditions, simplifying cable identification
- 2 Replaceable AAA Alkaline batteries, included
- Push-on remotes for ease of use
- Remote Kit (Cat. No. VDV512-101) includes a removable holder with 4 color coded remotes



VDV512-100



VDV512-101



REMOTE REPLACEMENT KIT VDV512-110



Cat. No.	Description	Cable Type	Test-n-Map ID Remotes	Connection & Adapter Types	Included
VDV512-100	Coax Explorer™ 2 Tester with Red Remote	RG59, RG6/6Q, RG7, RG11	(1) Red Remote (Included)	Coax F Adapters	Tester, Batteries, Red Remote
VDV512-101	Coax Explorer™ 2 Tester with Remote Kit	RG59, RG6/6Q, RG7, RG11	4 (Included)		Tester, Batteries, 4 Colored Push-on Remotes, F-adapter, Snap-on Remote Holder

VOICE DATA VIDEO (VDV) CABLE STAPLER



Ratcheting Data Cable Crimper/Stripper/Cutter

- Ratcheting crimper provides fast, reliable modular-crimp connector installation for voice and data applications
- Cuts, strips, and crimps pair-conductor cables (round STP/UTP and flat-satin phone cable) all in one tool
- Crimps 4, 6, and 8 position modular connectors (RJ22, RJ11/RJ12, and RJ45)
- Steel body with black-oxide finish for excellent performance and durability
- Ratchet safety-release and a blade-guard on cutting and stripping knives to protect fingers and reduce risk of injury
- Designed for Western Electric (WE)/Stewart Stamping (SS)-type modular connectors
- Full-cycle ratchet mechanism prevents the release of the connector prior to full compression
- Cable parameters: 28-22 AWG (.08 - .34 mm²) flat or round; solid or stranded telephone and data



VDV226-011-SEN

Cat. No.	Cuts & Strips:	Cable Type	Connector Type:	Cable Diameter	Handle Color:	Jaw Color	Overall Length:
VDV226-011-SEN	Paired Conductor Data Cable (Round STP/UTP); Flat-Satin Phone Cable	CAT3, CAT5e, CAT6/6A	RJ45, RJ11, RJ12 Standard	0.162" to 0.883" (4.11 to 22.42 mm)	Yellow/Black	Black	7.5" (19.1 cm)

Ratcheting Pass-Thru™ Modular Crimper

- All-in-one tool cuts and strips STP/UTP paired-conductor data cable and flat-satin phone cable
- Crimps with RJ11/RJ12 standard modular connectors, and crimps & trims with Klein Tools RJ45 Pass-Thru™ connectors
- Full-cycle ratchet mechanism ensures complete connector termination
- Trims flush to end face of connector to eliminate unintended contact between conductors
- On-tool wiring guide helps minimize wiring errors
- Use with Klein Tools Pass-Thru™ Connectors
- Not for use with standard (non pass-through) connectors



REPLACEMENT
BLADE KIT
VDV999-076



VDV226-110

Cat. No.	Cuts & Strips	Cable Size	Connector Type	Position/Pair/Conductors	Overall Length
VDV226-110	Paired Conductor Data Cable (Round STP/UTP) Flat-Satin Phone Cable	CAT3, CAT5e, CAT6/6A	RJ11 Standard RJ12 Standard RJ45 Klein Tools Pass-Thru™	4-Position, 1-Pair/2-Conductor, 4-Position, 2-Pair/4-Conductor 6-Position, 2-Pair/4-Conductor, 6-Position, 3-Pair/6-Conductor, 8-Position, 4-Pair/8-Conductor	6.094" (15.5 cm)

Loose Cable Stapler and Staples

- Drives insulated staples for Voice, Data, Video, NM-B (Romex®) and other nonmetallic (type NM) sheathed cable
- Adjustable to three sizes of staples: 1/4", 5/16", and 19/32"
- Forward action for stability and single-handed operation
- Channel face guides and protects cable
- Cast aluminum body for durability
- Adjustable force setting lever
- Ergonomic, Cushion-Grip handle
- Jam resistant mechanism
- Two-level staple guide opening for small and large cable and staple sizes
- Convenient clip for attaching stapler to belt or tool bag. Clip can be mounted to either side of the stapler
- UL-listed insulated staples secure flat and round cables. Sold separately in 300 qty. packs



Cat. No	Description
450-100	Loose Cable Stapler



Insulated Staples			
Cat No.	Cable Opening Size	Leg Length	For Use With
450-001	1/4" x 5/16" (6 mm x 8 mm)	11/16" (17 mm)	• CAT3/5e data cable • Speaker Wire
450-002	5/16" x 5/16" (8 mm x 8 mm)		• CAT3/5e/6/6A data cable • RG59/6/6Q coax cable
450-003	19/32" x 11/32" (15 mm x 9 mm)	7/8" (22 mm)	• CAT3/5e/6/6A (x2, x3) data cable • RG59/6/6Q (x2) coax cable • NM-B (Romex®) 14-3, 14-3G, 12-3





Your expertise matched with our steadfast Klein tools, is a winning combination for all your jobsite demands!

Our innovations and advancements for the **TELECOM** industry provides ease of mind with every installation.

dependable, reliable and long lasting tools. choose the company that has been manufacturing quality tools for you, the tradesman, since 1857.

That's why we're the choice of professionals in the USA



Join the Tradesman Club at www.kleintradesmanclub.com for newest products, innovations and chances to win **FREE** tools

For Professionals
SINCE 1857™

Scan the QR code to see our complete line of products



GO MOBILE

Text 52165

to receive alerts about new products and chances to win **FREE** tools



f y t i d
www.kleintools.com